## RoHS Complian


## CAB101RF: RF CABLE ASSEMBLY, SMA BULKHEAD JACK + RG174 CABLE + STRIP / TIN


## SPECIFICATIONS:

- 1. SMA ST BULKHEAD JACK (P/N: C02ABWS174003C). GOLD
- 2. RG174 COAXIAL CABLE, MIT, COLOR: BLACK
- 33. TWISTED BRAID OR FLEXIBLE COPPER WIRE. LENGTH = A (CENTRE CONDUCTOR) + B (INSULATOR). MINIMUM = 6.0MM. LENGTH 6.0MM - 9.9MM: TWISTED BRAID LENGTH +10MM: FLEXIBLE COPPER WIRE

## NOTES:

- 1. STRIP DIMENSION A / B / C STANDS FOR
- A = CENTRE CONDUCTOR
- B = INSULATOR
- C = BRAID.
- 2. INSERTION LOSS TEST REPORT IS NOT AVAILABLE.
- 3. THIS IS OUR STANDARD OFFERING SPECIAL DESIGNS ARE AVAILABLE INCLUDING CUSTOM TOLERANCES AND SPECIAL BRAID TINNING DESIGNS. PLEASE CONTACT GRADCONN FOR MORE INFORMATION.
- 4. CENTRE CONDUCTOR AND TWISTED BRAID OF COAX CABLE IS TINNED. WHEN BRAID LENGTH EXCEEDS 10MM LENGTH OF TINNED COPPER WIRE IS SOLDERED TO THE BRAID/SHIELD OF THE COAX CABLE WHICH ALLOWS SOLDERING TO PCB.
- 5. OPERATING TEMPERATURE: -20°C TO +80°C

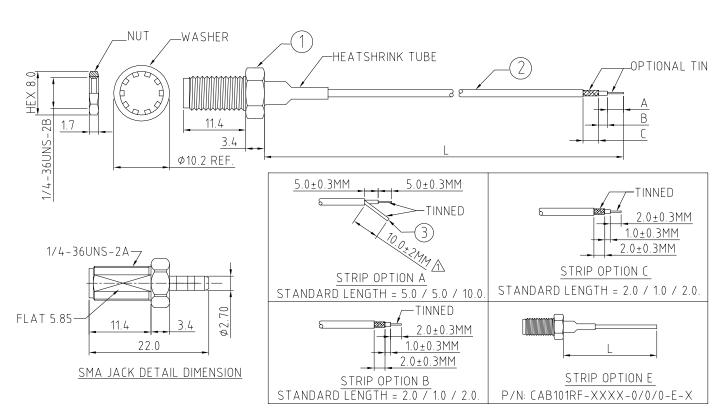



ea: 100MM = 0100 (MIN. = 0050, MAX. = 2000)

STANDARD = 0100, 0150, 0200)

Tolerance: <50mm: ±2mm.

51-200mm: ±5mm. 201-500mm: ±7mm.

>501mm: ±10mm.


A/B/C STRIP DIMENSION IN MM FOR STANDARD I FNGTH PLEASE REFER TO DRAWINGS. (SPECIALS AVAILABLE UPON

REQUEST.)

B = STRIPPED, END A TINNED C = STRIPPED, END A & C TINNED

STRIP AND TIN OPTIONS:

E = CLEAN CUT



RECOMMENDED SMA MOUNTING HOLE

| REV. DATE & DRN | .0 11/05/'10 - NYW RELEASE | 1.1 11/07/*11 - NYW | ♠ AMEND TOLERANCE.  ■ | 1.2 21/05/*15 - NYW | REMOVE STRIP OPTION '0'. | AMEND STRIP OPTION 'A'. | 3 11/07/'23 - NYW | ADD STRIP OPTION 'E'. | ADD NOTE 5. |   |
|-----------------|----------------------------|---------------------|---|---------------------|--------------------------|-------------------------|-------------------|-----------------------|-------------|---|
| 1%              | Ι≌.                        | Ξ.                  | ⋖   | 1.3                 |                          |                         | 12                |                       |             | ı |

| Scale: NTS        | THIRD ANGLE     | Unstated Tolerances: .X N/A .XX N/A | Material |
|-------------------|-----------------|-------------------------------------|----------|
| Drawn: NYW        | $\Rightarrow$   | XXX N/A ANGLES N/A                  | SEE NOTE |
| App'd: XXX        | Title CABLE ASS | NOT TO SCALE                        |          |
| Date: 11 JUL. '23 | Revision: 1.3   | Unit: mm                            |          |

A = CENTER CONDUCTOR & TWISTED BRAID/SOLDERED COPPER

WIRE TINNED (SEE NOTE 4 FOR SOLDER TO PCB APPLICATION)



| CAB101RF       |  |
|----------------|--|
| rawing Number: |  |
| : N L          |  |

| www.gradconn.com   | Sheet 1    | of 1      |
|--|------------|-----------|
| VING IS CONFIDENTIAL AND MUST NOT BE DISCLOSED WITHOUT WRITTEN CONSENT | Drawing (C | E and O E |