



CABLE 094 RF: RF CABLE ASSEMBLY, MURATA GSC + MURATA GSC + 0.81MM CABLE


SPECIFICATIONS

- 1. MURATA GSC (MXTK92)
- 2. 0.81MM COAXIAL CABLE, COLOR: GRAY

NOTES:

- 1. THE ORIENTATION OF CONNECTORS ON DRAWING IS FOR REFERENCE ONLY.
- 2. FIXED ORIENTATION IS NOT AVAILABLE.
- 3. WORKING FREQUENCY RANGE: DC-6GHz

USAGE PRECAUTIONS: CABLES USING 'MICRO' COAX ARE DELICATE:  
 (i) HANDLE WITH CARE.  
 (ii) DO NOT TWIST; APPLY EXCESSIVE FORCES OR SHARP BENDS TO THE CABLE. DO NOT FORCEFULLY DEFORM WIRES.  
 (iii) CONSULT CONNECTOR MANUFACTURER'S DATASHEETS FOR DETAILED NOTES ON HANDLING INSTRUCTIONS.

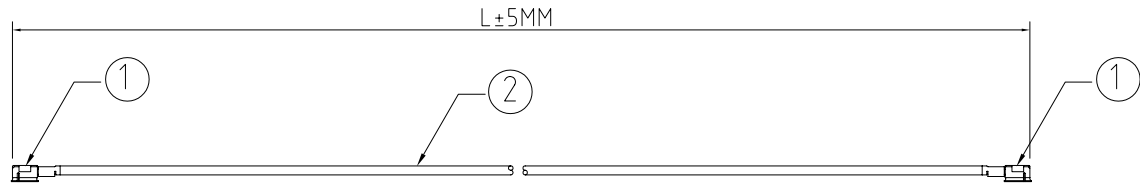

HOW TO ORDER  
 CABLE 094 RF - X X X

"L" LENGTH IN MM  
 eg: 100MM = 100  
 (MIN. 25 - MAX. 400,  
 STANDARD : 100, 150, 200)

REV. DATE & DRN  
 10 06/07/10-NYW RELEASE  
 11 13/01/10-CHC  
 REMOVE DIRECTION OPTION

Scale: NTS	THIRD ANGLE	Unstated .X .XX .XXX ANGLES	Tolerances: ±0.2 ±0.1 ±0.05 ±5	Material SEE NOTE
Drawn: NYW				
App'd: XXX	Title CABLE ASSEMBLY	NOT TO SCALE		
Date: 13 JAN '10	Revision: 1.1	Unit: mm		

www.gradconn.com

© THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE COPIED OR DISCLOSED WITHOUT WRITTEN CONSENT

Type: Cable 094 RF
CABLE 094 RF
Drawing Number:
Sheet 1 of 1
Drawing © E and O E