## CUSTOMER PRODUCT SPECIFICATION SHEET

# RoHS Compliant

### \_\_\_\_\_

# CAB443RF: I-PEX MHF + ISOLATED RP SMA STRAIGHT BULKHEAD JACK WITH O-RING RATED TO IP67 + RG178 CABLE, 6GHz

### SPECIFICATIONS:

- 1. I-PEX MHF PLUG. P/N: 20278-112R-18.
- 2. RG178 COAXIAL CABLE, COLOR: BROWN.
- 3. ISOLATED RP SMA STRAIGHT BULKHEAD JACK WITH 0-RING RATED TO IP67, NICKEL PLATED, P/N: RFCT-SMA086-F78.

#### ENVIRONMENTAL:

- A. BULKHEAD MOUNTED CONNECTOR (RFCT-SMA086-F78) RATED TO THE FOLLOWING SPECIFICATION:
  - i. IP6X DUST TIGHT NO PARTICLE INGRESS.
- ii. IPX7 WATERPROOF FOR 30 MINUTES UP TO 1 METER UNDERWATER.


#### NOTES:


- THE ORIENTATION OF CONNECTORS ON DRAWING IS FOR REFERENCE ONLY, IF THE ORDER IS LEFT BLANK THE CONNECTOR WILL NOT HAVE FIXED ORIENTATION.
- 2. FIXED ORIENTATION IS SUGGESTED FOR CABLE LENGTH 25MM TO 100MM.

  PLEASE SPECIFY THE FIXED ORIENTATIONS FROM THE ORDER CODE (F1, F2, ETC)
- 3. CONTACT GRADCONN IF THE ORIENTATION YOU REQUIRE IS NOT SHOWN.
- 4. WORKING FREQUENCY RANGE: DC-6GHz.
- 5. OPERATING TEMPERATURE: -40°C TO +80°C.
- 6. IMPEDANCE: 50 Ohm.
- 7. CARE SHOULD BE TAKEN NOT TO OVERTIGHTEN THE MATING CONNECTOR. OVERTIGHTENING RISKS COMPROMISING THE IP RATING OF THE CONNECTOR.

## USAGE PRECAUTIONS: CABLES USING 'MICRO' COAX ARE DELICATE:

- (i) HANDLE WITH CARE.
- (ii) DO NOT TWIST; APPLY EXCESSIVE FORCES OR SHARP BENDS TO THE CABLE. DO NOT FORCEFULLY DEFORM WIRES.
- (iii) CONSULT CONNECTOR MANUFACTURER'S DATASHEETS FOR DETAILED NOTES ON HANDLING INSTRUCTIONS.

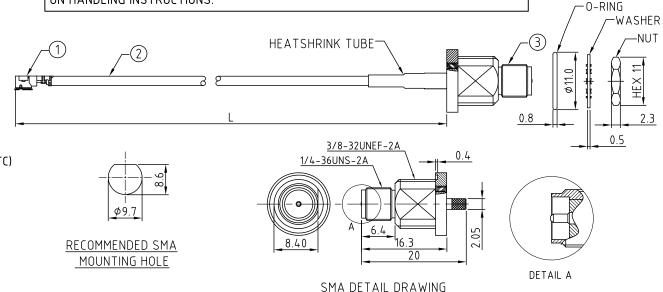



 $CAB443RF - \underline{X} \underline{X} \underline{X} \underline{X} - \underline{X} \underline{X} - \underline{X} - \underline{X} - \underline{1}$ 

"L" LENGTH IN MM:
eg: 100MM = 0100
(MIN. 0025-MAX.0400
STANDARD = 0100, 0150, 0200)
Tolerance: <50mm: ±2mm
50-200mm: ±5mm.
201-400mm: ±7mm.

O-RING, WASHER AND NUT OPTIONS: BLANK = SEPARATELY PACKED (STANDARD) A = ASSEMBLED WITH CONNECTOR

ORIENTATION OPTIONS:


BLANK = DOES NOT HAVE A FIXED ORIENTATION

F1 = MHF CONNECTION DOWN (L=25-200MM)

F2 = MHF CONNECTION UP (L=25-200MM)

F3 = MHF CONNECTION AND D FLAT SAME ORIENTATION (L=25-200MM)
F4 = MHF CONNECTION AND D FLAT OPPOSITE ORIENTATION (L=25-200MM)

(SEE NOTES 1, 2, 3 AND DIAGRAMS FOR MORE INFORMATION)



Flat	Flat			
'F1' ORIENTATION	<u>'F3' ORIENTATION</u>			
Flat	Flat			
'F2' ORIENTATION	<u>'F4' ORIENTATION</u>			

Scale:	NTS	THIRD ANGLE	Unstated .X .XX	Tolerances: N/A N/A
Drawn:	СС	$\Rightarrow$		N/A N/A
App'd:	xxx	Title CABLE ASSEMBLY		
Date: 20	JAN. '24	Revision: 1.5	Unit: m	m





(C) THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE COPIED OR DISCLOSED WITHOUT WRITTEN CONSENT

Drawing Number:
CAB443RF

Sheet 1 of 1
Drawing (C) E and 0 E