

CABLE 118 RF: RF CABLE ASSEMBLY, I-PEX MHF III + SMA STRAIGHT PLUG + 0.81MM CABLE - 6GHz


SPECIFICATIONS

1. I-PEX MHF III PLUG (20367-001R-08),
(ALTERNATIVE TO HIROSE W.FL)
2. 0.81MM COAXIAL CABLE, COLOR: GRAY
3. SMA STRAIGHT PLUG (C01AA31081004)

NOTES:

1, ELECTRICAL
WORKING FREQUENCY RANGE: DC-6GHz

USAGE PRECAUTIONS: CABLES USING 'MICRO' COAX ARE DELICATE:
 (i) HANDLE WITH CARE.
 (ii) DO NOT TWIST, APPLY EXCESSIVE FORCES OR SHARP BENDS TO THE CABLE. DO NOT FORCEFULLY DEFORM WIRES.
 (iii) CONSULT CONNECTOR MANUFACTURER'S DATASHEETS FOR DETAILED NOTES ON HANDLING INSTRUCTIONS.

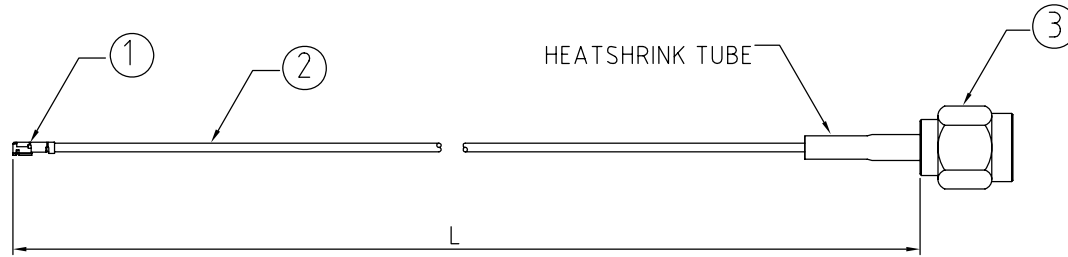

HOW TO ORDER

CABLE 118 RF - X X X

"L" LENGTH IN MM
 eg: 100MM = 0100
 (MIN. 025-MAX.400)
 STANDARD = 100, 150, 200
 Tolerance: <50mm : ±2mm.
 51-200mm: ±5mm.
 201-400mm: ±7mm.

REV. DATE & DRN
 11 10/06/11 - NYW RELEASE
 11 10/06/11 - NYW
 CHANGE WORKING FREQUENCY
 TO 6GHz.

Scale: NTS	THIRD ANGLE	Unstated .X .XX .XXX ANGLES	Tolerances: ±0.2 ±0.1 ±0.05 ±5	Material SEE NOTE
Drawn: NYW				
App'd: XXX	Title CABLE ASSEMBLY	NOT TO SCALE		
Date: 10 JUN '11	Revision: 1.1	Unit: mm		



THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE COPIED OR DISCLOSED WITHOUT WRITTEN CONSENT

Type: Cable 118 RF
CABLE 118 RF
Drawing Number:
Sheet 1 of 1
Drawing © E and O E