CUSTOMER PRODUCT SPECIFICATION SHEET

RoHS Compliant

CABLE 360 RF: SMA STRAIGHT PLUG + BNC STRAIGHT BULKHEAD JACK WITH 0-RING RATED TO IP67/68 + RG174 CABLE

SPECIFICATIONS:


- 1. SMA STRAIGHT PLUG, P/N: RFCT-SMA027-M74.
- 2. RG174 COAXIAL CABLE, COLOR: BLACK.
- 3. BNC STRAIGHT BULKHEAD JACK WITH O-RING RATED TO IP67/68, P/N: RFCT-BNC001-F74.


ENVIRONMENTAL:


- A. BULKHEAD MOUNTED CONNECTOR (RFCT-BNC001-F74) TESTED TO THE FOLLOWING SPECIFICATION:
 - i. IP6X DUST TIGHT NO PARTICLE INGRESS.
 - ii. IPX7 WATERPROOF FOR 30 MINUTES UP TO 1 METER UNDERWATER.
- iii. IPX8 WATERPROOF FOR 48 HOURS AT 1 METER UNDERWATER.
- iv. IPX8 WATERPROOF FOR 12 HOURS AT 5 METERS UNDERWATER.
- v. PRESSURE TEST 1 BAR FOR 10 SECONDS.

NOTES:

- 1. WORKING FREQUENCY RANGE: DC-3GHz.
- 2. OPERATING TEMPERATURE: -40°C TO +80°C.
- 3. IMPEDANCE: 50 OHM

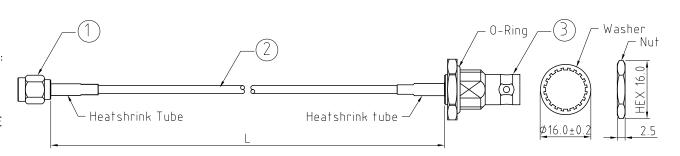





BNC DETAIL DRAWING

HOW TO ORDER


CABLE 360 RF - X X X X - X - 1 CABLE SIZE: -1 = RG174 CABLE, COLOR: BLACK "L" LENGTH IN MM eq: 100MM = 0100

= 0100, 0150, 0200)Tolerance: 50-200mm: ±5mm. 201-500mm: ±7mm.

>500mm: ±10mm.

(MIN. = 0050, MAX. = 2000, STANDARD

O-RING. WASHER AND NUT OPTIONS: BLANK = SEPARATELY PACKED (STANDARD) A = ASSEMBLED WITH CONNECTOR



VW DELFACE	ASE		Scale:	NTS	THIRD ANGLE	Unstated .X .XX	Tolerance N/A N/A
	YW RELE		Drawn:	СС	→ ◆		N/A N/A
TE & DR	0 22/10/19 - NYW RELEASE 1 24/03/"24 - CC ADD IP RATING VIEW		App'd:	xxx	Title CABLE AS	E ASSEMBLY	
EV. DV	42 2 2 4 4 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5		Date: 24	MAR. '24	Revision: 1.1	Unit: п	nm





Type: Cable 360 RF CABLE 360 RF Drawing Number:

Sheet 1 of 1

Drawing (C) | E and 0 E