

CABLE 367 RF: RF CABLE ASSEMBLY, HIROSE W.FL + FREE HANG SMA STRAIGHT JACK + 0.81MM CABLE - 6GHz

SPECIFICATIONS:



1. HIROSE W.FL PLUG, P/N: W.FL-LP-040
2. 0.81MM COAXIAL CABLE, COLOR: GRAY
3. FREE HANG SMA STRAIGHT JACK, P/N: RFCT-SMA067-F08

NOTES:

1. WORKING FREQUENCY RANGE: DC-6GHz
2. OPERATING TEMPERATURE: -40°C TO +90°C
3. IMPEDANCE: 50 OHM

USAGE PRECAUTIONS: CABLES USING 'MICRO' COAX ARE DELICATE:

- (i) HANDLE WITH CARE.
- (ii) DO NOT TWIST, APPLY EXCESSIVE FORCES OR SHARP BENDS TO THE CABLE. DO NOT FORCEFULLY DEFORM WIRES.
- (iii) CONSULT CONNECTOR MANUFACTURER'S DATASHEETS FOR DETAILED NOTES ON HANDLING INSTRUCTIONS.

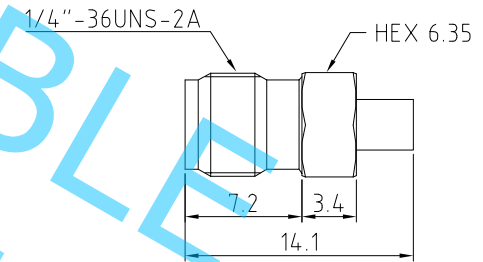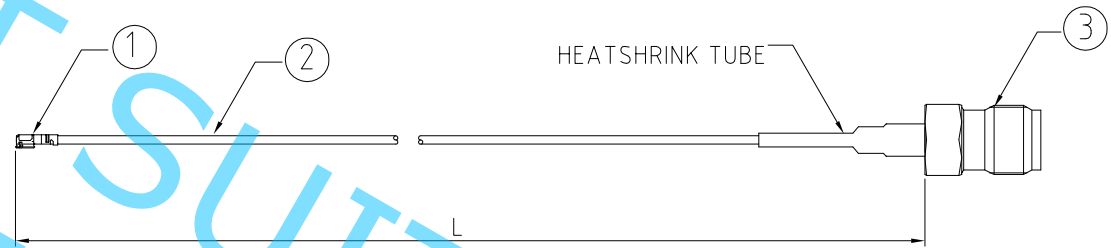

HOW TO ORDER

CABLE 367 RF - X X X

"L" LENGTH IN MM
 eg: 100MM = 100
 (MIN. 025-MAX.400)
 STANDARD = 100, 150, 200
 Tolerance: <50mm : ±2mm.
 51-200mm: ±5mm.
 201-400mm: ±7mm.

FOR NOT NEW SUITABLE DESIGNS

REV. DATE & DRN
10 28/11/19 - NYW RELEASE

Scale: NTS	THIRD ANGLE	Unstated X .XX .XXX ANGLES	Tolerances: N/A N/A N/A N/A	Material SEE NOTE
Drawn: NYW				
App'd: XXX	Title: CABLE ASSEMBLY	NOT TO SCALE		
Date: 28 NOV. '19	Revision: 1.0	Unit: mm		



www.gradconn.com

© THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE COPIED OR DISCLOSED WITHOUT WRITTEN CONSENT

Type: Cable 367 RF
CABLE 367 RF
Drawing Number:
Sheet 1 of 1
Drawing © E and O E