


CABLE 135 RF: RF CABLE ASSEMBLY, MCX RIGHT ANGLE JACK + RG316 CABLE + MCX RIGHT ANGLE JACK

SPECIFICATIONS

1. MCX R/A JACK, P/N: C08BA3F174009
2. RG316 COAXIAL CABLE, COLOR: BROWN

NOTES:

1. THE ORIENTATION OF CONNECTORS ON DRAWING IS FOR REFERENCE ONLY, IF THE ORDER IS LEFT BLANK THE CONNECTOR WILL NOT HAVE FIXED ORIENTATION.
2. FIXED ORIENTATION IS POSSIBLE FOR CABLE LENGTH 50MM TO 220MM. PLEASE SPECIFY THE FIXED ORIENTATIONS FROM THE ORDER CODE (F1, F2, ETC)
3. CONTACT GRAD CONN IF THE ORIENTATION YOU REQUIRE IS NOT SHOWN.
4. WORKING FREQUENCY RANGE: DC-6GHz.

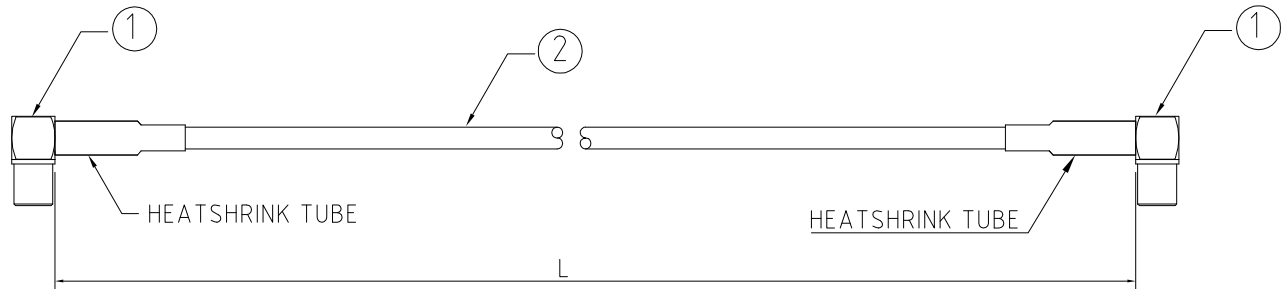


HOW TO ORDER

CABLE 135 RF - X X X X - X X - 0

"L" LENGTH IN MM  
 eg: 100MM = 0100  
 (MIN. = 0050, MAX. = 2000,  
 STANDARD = 0100, 0150, 0200)  
 Tolerance: <50mm : ±2mm.  
 51-200mm: ±5mm.  
 201-500mm: ±7mm.  
 >501mm: ±10mm.

CABLE SIZE OPTIONS:  
 0 = RG316 CABLE, COLOR: BROWN

BLANK = DOES NOT HAVE A FIXED ORIENTATION  
 F1 = OPPOSITE ORIENTATION (L=50-220MM)  
 F2 = SAME ORIENTATION (L=50-220MM)  
 (SEE NOTES 1, 2, 3 AND DIAGRAMS FOR MORE INFORMATION)

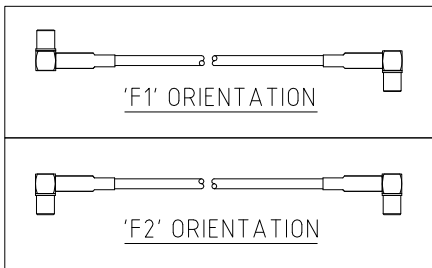

REV. DATE & DRN  
 T10 28/03/12 - NYW RELEASE  
 T11 05/07/13 - NYW  
 ADD NOTE 4

Scale: NTS	THIRD ANGLE	Unstated Tolerances: .X ±0.2 .XX ±0.1 .XXX ±0.05 ANGLES ±5	Material SEE NOTE
Drawn: NYW			
App'd: XXX	Title CABLE ASSEMBLY	NOT TO SCALE	
Date: 5 FEB. '13	Revision: 1.1	Unit: mm	

www.gradconn.com

THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE COPIED OR DISCLOSED WITHOUT WRITTEN CONSENT

Type: Cable 135 RF
CABLE 135 RF
Drawing Number:
Sheet 1 of 1
Drawing © E and O E