



Component Temperature Check List

Grad Conn Ltd.
格瑞康實業有限公司

填表日期 (Date) : 2006.06.19

填表人 (Prepare By): 管葉波

零件名稱	接腳/端子外鍍層	重複焊錫次數	溫升	SMT最大耐溫°C幾秒	DIP最大耐溫°C幾秒	手焊最大耐溫°C幾秒
Component Description	Lead /Terminal Coating	Resolder Times	$\Delta T(^{\circ}C)$	SMT Max Temp. Time	Wave Solder Max Temp. Time	Hand Solder Max Temp. Time
Connectors with PBT insulators.	Au	3	30°C	N/A	210°C/10 sec. (With SMT Reflow Test)	330°C/3~5 sec.


溫度曲線圖

Component Temp. Profile

FORSURE SMT REFLOW M/C TEST SYSTEM

CURRENT TEMPERATURE 139 °C

MAXIMUM TEMPERATURE 213 °C

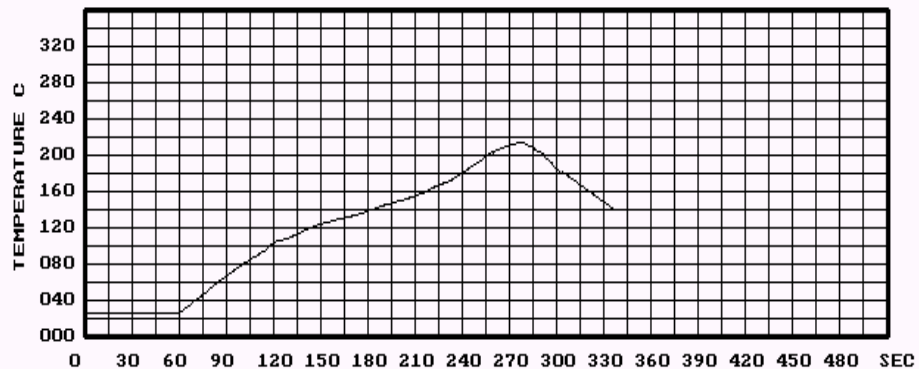

START TEST

QUIT

PCB TYPE: _____

STOP TEST & QUIT

RESET

DATE: _____

接腳/端子鍍層剖面圖

Lead / Terminal Cross Section

