


CABLE 137 RF: RF CABLE ASSEMBLY, SMA ST PLUG + N ST FRONT MOUNT BULKHEAD JACK WITH O-RING + RG174 CABLE

SPECIFICATIONS

1. SMA STRAIGHT PLUG P/N: C01AA31174004A
2. RG174 COAXIAL CABLE, COLOR: BLACK.
3. N ST BULKHEAD (FRONT MOUNT) WITH O-RING, P/N: C28CL3F174017

NOTES:

1. WORKING FREQUENCY RANGE: DC-3GHz.

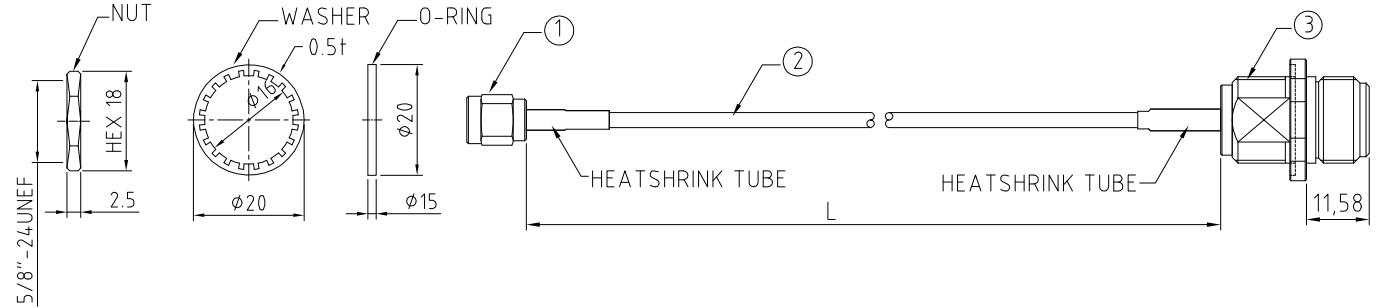


HOW TO ORDER
CABLE 137 RF - X X X X - X - 1

"L" LENGTH IN MM
eg: 100MM = 0100
(MIN. = 0050, MAX. = 2000)
STANDARD = 0100, 0150, 0200
Tolerance: <50mm : ±2mm.
51-200mm: ±5mm.
201-500mm: ±7mm.
>501mm: ±10mm.

WASHER AND NUT OPTIONS:
BLANK = SEPERATELY PACKED (STANDARD)
A = ASSEMBLED WITH CONNECTOR

CABLE SIZE OPTIONS:
1 = RG174 CABLE, COLOR: BLACK

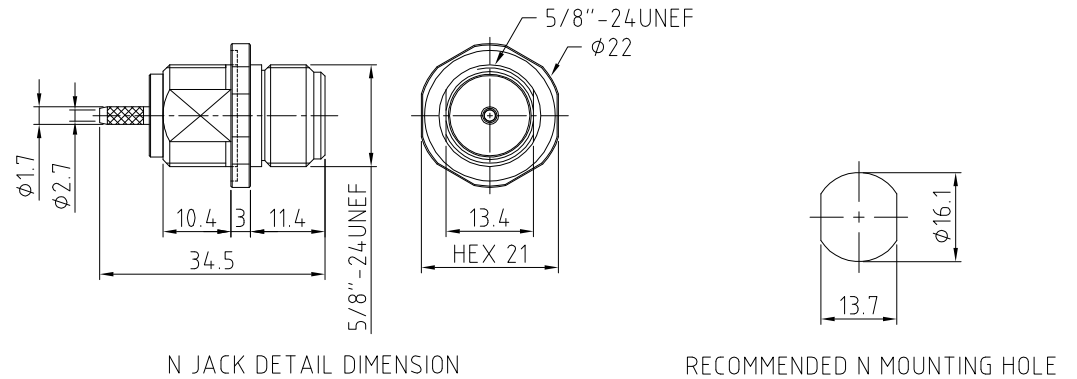

N JACK DETAIL DIMENSION

RECOMMENDED N MOUNTING HOLE

REV. DATE & DRN
10 02/07/12 - NYW RELEASE
11 04/07/12 - NYW
ADD N JACK MOUNTING HOLE
12 05/02/13 - NYW
ADD NOTE 1

Scale: NTS	THIRD ANGLE	Unstated X .XX .XXX ANGLES	Tolerances: ±0.2 ±0.1 ±0.05 ±5	Material SEE NOTE
Drawn: NYW				
App'd: XXX	Title: CABLE ASSEMBLY	NOT TO SCALE		
Date: 5 FEB. '13	Revision: 1.2	Unit: mm		

www.gradconn.com

THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE COPIED OR DISCLOSED WITHOUT WRITTEN CONSENT

Type: Cable 137 RF
CABLE 137 RF
Drawing Number:
Sheet 1 of 1
Drawing © E and O E