

CABLE 183 RF: RF CABLE ASSEMBLY, MURATA JSC PLUG + I-PEX MHF PLUG + 0.81MM CABLE


SPECIFICATIONS:

1. MURATA JSC PLUG (MXJA01)
2. 0.81MM COAXIAL CABLE, COLOR: WHITE
3. I-PEX MHF PLUG (20278-112R-08), GOLD

NOTES:

1. THE ORIENTATION OF CONNECTORS ON DRAWING IS FOR REFERENCE ONLY, IF THE ORDER IS LEFT BLANK THE CONNECTOR WILL NOT HAVE FIXED ORIENTATION.
2. FIXED ORIENTATION IS SUGGESTED FOR CABLE LENGTH 25MM TO 100MM. PLEASE SPECIFY THE FIXED ORIENTATIONS FROM THE ORDER CODE (F1, F2, ETC)
3. CONTACT GRAD CONN IF THE ORIENTATION YOU REQUIRE IS NOT SHOWN.
4. WORKING FREQUENCY RANGE: DC-6GHz

USAGE PRECAUTIONS: CABLES USING 'MICRO' COAX ARE DELICATE:  
 (i) HANDLE WITH CARE.  
 (ii) DO NOT TWIST; APPLY EXCESSIVE FORCES OR SHARP BENDS TO THE CABLE. DO NOT FORCEFULLY DEFORM WIRES.  
 (iii) CONSULT CONNECTOR MANUFACTURER'S DATASHEETS FOR DETAILED NOTES ON HANDLING INSTRUCTIONS.

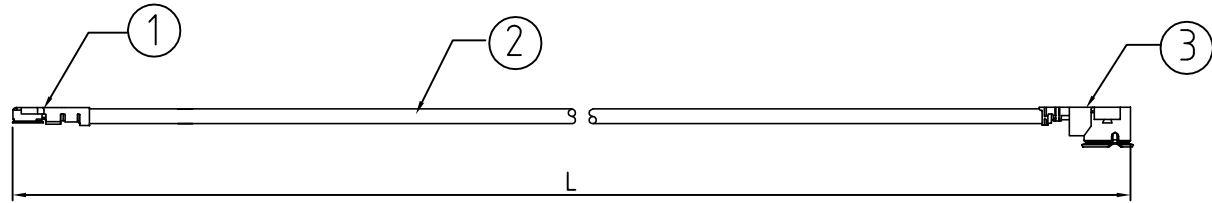

HOW TO ORDER

CABLE 183 RF - X X X - X X

"L" LENGTH IN MM

eg: 100MM = 100

(MIN. = 025, MAX. = 400

STANDARD = 100, 150, 200)

Tolerance: <50mm : ±2mm.

51-200mm: ±5mm.

201-400mm: ±7mm.


ORIENTATION OPTIONS:

BLANK = DOES NOT HAVE A FIXED ORIENTATION

F1 = OPPOSITE ORIENTATION (L=25-220MM)

F2 = SAME ORIENTATION (L=25-220MM)

(SEE NOTES 1, 2, 3 AND DIAGRAMS FOR MORE INFORMATION)

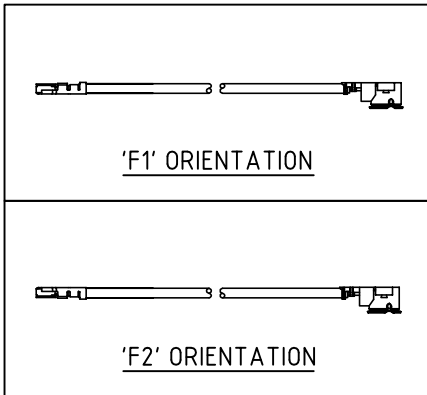

REV. DATE & DRN  
1.0 27/10/16 - NYW RELEASE  
1.1 26/04/19 - NYW  
RE-DEFINE CABLE COLOR.

Scale: NTS	THIRD ANGLE	Unstated .X .XX .XXX	Tolerances: N/A N/A N/A	Material SEE NOTE
Drawn: NYW		ANGLES	N/A	
App'd: XXX	Title CABLE ASSEMBLY	NOT TO SCALE		
Date: 26 APR. '19	Revision: 1.1	Unit: mm		



www.gradconn.com

THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE COPIED OR DISCLOSED WITHOUT WRITTEN CONSENT

Type: Cable 183 RF
CABLE 183 RF
Drawing Number:
Sheet 1 of 1
Drawing © E and O E