


CABLE 137 RF: RF CABLE ASSEMBLY, SMA ST PLUG + N ST FRONT MOUNT BULKHEAD JACK WITH O-RING + RG174 CABLE

SPECIFICATIONS

1. SMA STRAIGHT PLUG P/N: RFCT-SMA027-M74.
2. RG174 COAXIAL CABLE, COLOR: BLACK.
3. N ST BULKHEAD (FRONT MOUNT) WITH O-RING, P/N: RFCT-N010-F74.

NOTES:

1. WORKING FREQUENCY RANGE: DC-3GHz.
2. It is intended that mounting of this connector is achieved using the nut and washer provided. Please contact GradConn for advise if planning to use a different method of mounting.

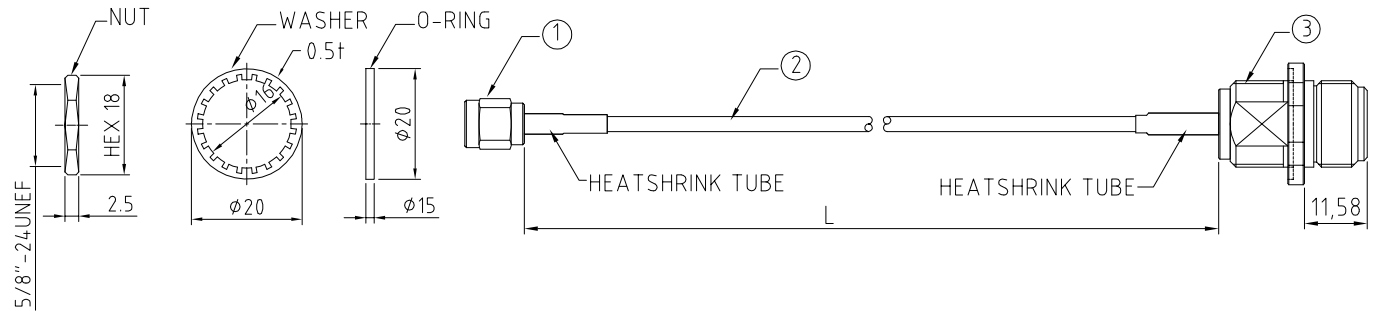

HOW TO ORDER

CABLE 137 RF - X X X X - X - 1

"L" LENGTH IN MM

eg: 100MM = 0100

(MIN. = 0050, MAX. = 2000)

STANDARD = 0100, 0150, 0200)

Tolerance: <50mm : ±2mm.

51-200mm: ±5mm.

201-500mm: ±7mm.

>501mm: ±10mm.


WASHER AND NUT OPTIONS:

BLANK = SEPERATELY PACKED (STANDARD)

A = ASSEMBLED WITH CONNECTOR

CABLE SIZE OPTIONS:

1 = RG174 CABLE, COLOR: BLACK

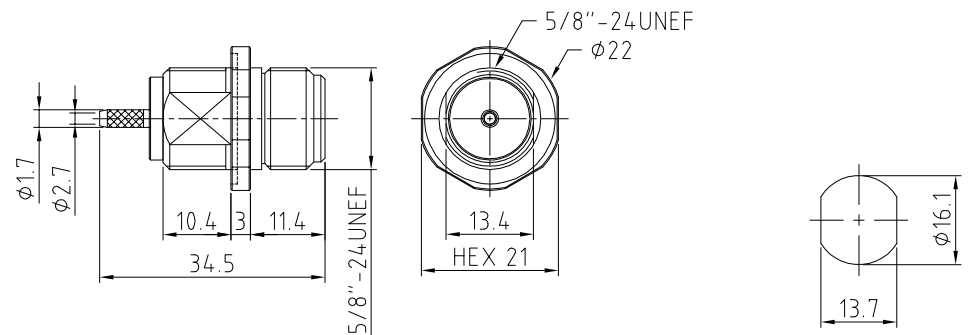

N JACK DETAIL DIMENSION

RECOMMENDED N MOUNTING HOLE

REV. DATE & DRN
10 02/07/12 - NYW RELEASE
11 04/07/12 - NYW ADD N JACK MOUNTING HOLE
12 05/02/13 - NYW ADD NOTE 1
13 12/08/20 - NYW UPDATE SMA AND N P/N'S

Scale: NTS	THIRD ANGLE	Unstated X .XX .XXX ANGLES	Tolerances: N/A N/A N/A N/A	Material SEE NOTE
Drawn: NYW				
App'd: XXX	Title: CABLE ASSEMBLY	NOT TO SCALE		
Date: 12 AUG. '20	Revision: 13	Unit: mm		

www.gradconn.com

THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE COPIED OR DISCLOSED WITHOUT WRITTEN CONSENT

Type: Cable 137 RF
CABLE 137 RF
Drawing Number:
Sheet 1 of 1
Drawing © E and O E