

CABLE 341 RF: RF CABLE ASSEMBLY, I-PEX MHF PLUG + MMCX STRAIGHT JACK + 1.32MM DUAL SHIELD CABLE

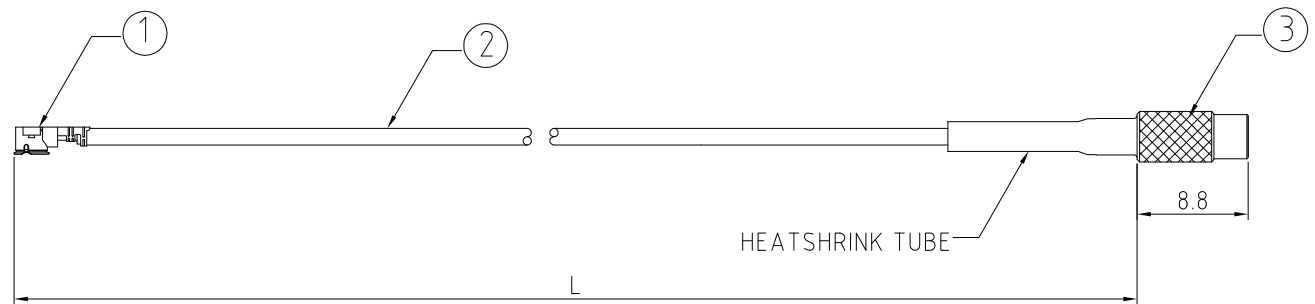
SPECIFICATIONS:

1. I-PEX MHF PLUG, P/N: 20278-112R-32.
2. ϕ 1.32MM DUAL SHIELD COAXIAL CABLE, COLOR: GRAY.
3. MMCX STRAIGHT JACK, GOLD PLATING, P/N: RFCT-MMCX-008-F32.

USAGE PRECAUTIONS: CABLES USING 'MICRO' COAX ARE DELICATE:
 (i) HANDLE WITH CARE.
 (ii) DO NOT TWIST; APPLY EXCESSIVE FORCES OR SHARP BENDS TO THE CABLE. DO NOT FORCEFULLY DEFORM WIRES.
 (iii) CONSULT CONNECTOR MANUFACTURER'S DATASHEETS FOR DETAILED NOTES ON HANDLING INSTRUCTIONS.

NOTES:

1. WORKING FREQUENCY RANGE: DC - 6GHz.





HOW TO ORDER

CABLE 341 RF - X X X - 1

"L" LENGTH IN MM
 eg: 100MM = 100
 (MIN. = 025, MAX. = 400)
 STANDARD = 100, 150, 200)
 Tolerance: 25-50mm : \pm 2mm.
 51-200mm: \pm 5mm.
 201-400mm: \pm 7mm.

REV. DATE & DRN TO 03/04/19 - NYW RELEASE

Scale: NTS	THIRD ANGLE	Unstated .X .XX .XXX ANGLES	Tolerances: N/A N/A N/A N/A	Material SEE NOTE	 www.gradconn.com THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE COPIED OR DISCLOSED WITHOUT WRITTEN CONSENT	Type: Cable 341 RF
Drawn: NYW				NOT TO SCALE		CABLE 341 RF
App'd: XXX	Title CABLE ASSEMBLY					Drawing Number:
Date: 3 APR. '19	Revision: 1.0	Unit: mm				Sheet 1 of 1 Drawing © E and O E