

BB02-CZ :- 1.27mm X 1.27mm SOCKET, RIGHT ANGLE, THROUGH HOLE, DUAL ROW - 06 TO 80 CONTACTS


SPECIFICATIONS

CURRENT RATING	1 AMPS
INSULATOR RESISTANCE	1000 MEGOHMS MIN.
DIELECTRIC WITHSTANDING	AC 500 V
OPERATING TEMPERATURE	-40°C TO +105°C
CONTACT MATERIAL	PHOSPHOR BRONZE
INSULATOR MATERIAL	POLYESTER UL 94V-0 STANDARD NYLON 6T
PLATING	GOLD OR TIN OVER 30~50U" NICKEL
SOLDERABILITY	IR REFLOW: 260°C FOR 10 SEC WAVE: 230°C FOR 5-10 SEC MANUAL SOLDER: 350°C FOR 3-5SEC

NOTES:

1. PACKED IN TUBE.
2. RECOMMENDED MATING PIN LENGTH: 3.5MM. Δ

MATES WITH: BB02-BC BB02-NE
BB02-BD
BB02-BK
BB02-BP
BB02-BS

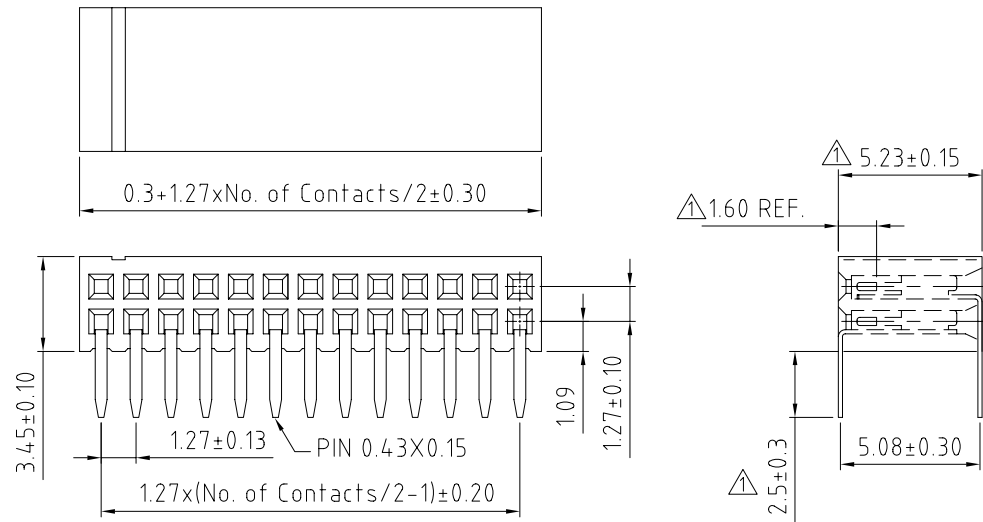


HOW TO ORDER



NO. OF CONTACTS
06 TO 80

CONTACT PLATING OPTIONS
K = GOLD FLASH (STANDARD)
A = 10U" GOLD ON CONTACT/GOLD FLASH ON TAIL
B = 15U" GOLD ON CONTACT/GOLD FLASH ON TAIL
C = 30U" GOLD ON CONTACT/GOLD FLASH ON TAIL
T = BRIGHT TIN
M = MATT TIN

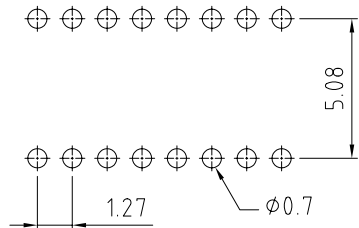

RECOMMENDED PC BOARD SMD LAYOUT

REV.	DATE & DRN
10	18/08/06 - NYW RELEASE
11	04/06/07 - NYW AMEND INSULATOR LAYOUT. ADD INSULATOR LENGTH. ADD NOTES Z. ADD CONTACT DIM.
12	16/10/07 - CHC REMOVE SELECTIVE GOLD CONTACT PLATING.
13	21/05/08 - CHC PLATING MODIFICATION.
14	29/12/08 - CHC DRAWING MODIFICATION.

Scale:	5:1	THIRD ANGLE	Unstated Tolerances: X. ± 0.30 .X ± 0.25 .XX ± 0.15 .XXX ± 0.10	Material	SEE NOTE
Drawn:	CHC				
App'd:	XXXX	Title:	SOCKET		NOT TO SCALE
Date:	29 DEC '08	Revision:	1.4		Unit: mm

www.gradconn.com

THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE COPIED OR DISCLOSED WITHOUT WRITTEN CONSENT

Type:	BB02-CZ
Drawing Number:	BB02-CZ
Sheet 1	of 1
Drawing	E and O E