

CABLE 076 RF: RF CABLE ASSEMBLY, I-PEX MHF PLUG + SMA ST PLUG + RG178 CABLE - 6GHz


SPECIFICATIONS

1. I-PEX MHF PLUG (20351-112R-37), GOLD (ALTERNATIVE TO HIROSE U.FL)
2. RG178-MIT COAXIAL CABLE, COLOR: BROWN
3. SMA ST PLUG (C01AA31178004), GOLD
4. HEATSHRINK

NOTES:


1. WORKING FREQUENCY RANGE: DC~6GHz

USAGE PRECAUTIONS: CABLES USING 'MICRO' COAX ARE DELICATE:
 (i) HANDLE WITH CARE.
 (ii) DO NOT TWIST; APPLY EXCESSIVE FORCES OR SHARP BENDS TO THE CABLE. DO NOT FORCEFULLY DEFORM WIRES.
 (iii) CONSULT CONNECTOR MANUFACTURER'S DATASHEETS FOR DETAILED NOTES ON HANDLING INSTRUCTIONS.

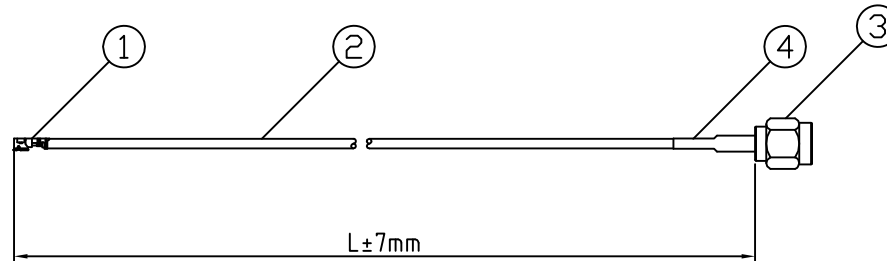


HOW TO ORDER
 CABLE 076 RF - X X X

"L" LENGTH IN MM
 eg: 100MM = 100
 (MIN. 50,
 STANDARD : 100, 150, 200)

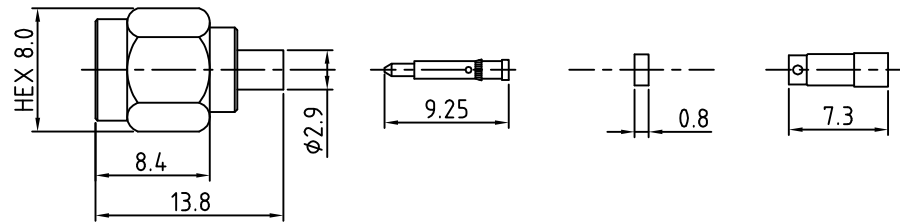

SMA ST PLUG DETAIL DIMENSION



RECOMMENDED CABLE STRIPPING DIM

REV. DATE & DRN
 10 25/07/09 - CHC RELEASE

Scale: NTS	THIRD ANGLE	Unstated .X .XX .XXX ANGLES	Tolerances: ±0.2 ±0.1 ±0.05 ±5	Material SEE NOTE
Drawn: CHC				
App'd: XXX	Title CABLE ASSEMBLY	NOT TO SCALE		
Date: 25 JULY '09	Revision: 1.0	Unit: mm		



www.gradconn.com

THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE COPIED OR DISCLOSED WITHOUT WRITTEN CONSENT

Type: Cable 076 RF
CABLE 076 RF
Drawing Number:
Sheet 1 of 1
Drawing © E and O E