



CABLE 096 RF: RF CABLE ASSEMBLY, I-PEX MHF + RP SMA JACK S/T PCB MOUNT CABLE TYPE + MULTIPLE CABLE SIZES

SPECIFICATIONS




1. I-PEX MHF PLUG (SEE CHART FOR P/N)
2. MIT COAXIAL CABLE (SEE CHART FOR DETAIL)
3. HEATSHRINK, COLOR: BLACK
4. SMA JACK S/T PCB MOUNT CABLE TYPE (SEE CHART FOR P/N)

USAGE PRECAUTIONS: CABLES USING 'MICRO' COAX ARE DELICATE:

- (i) HANDLE WITH CARE.
- (ii) DO NOT TWIST; APPLY EXCESSIVE FORCES OR SHARP BENDS TO THE CABLE. DO NOT FORCEFULLY DEFORM WIRES.
- (iii) CONSULT CONNECTOR MANUFACTURER'S DATASHEETS FOR DETAILED NOTES ON HANDLING INSTRUCTIONS.

NOTES:

1. THE ORIENTATION OF CONNECTORS ON DRAWING IS FOR REFERENCE ONLY, IF THE ORDER IS LEFT BLANK THE CONNECTOR WILL NOT HAVE FIXED ORIENTATION.
2. FIXED ORIENTATION IS POSSIBLE FOR CABLE LENGTH 25MM TO 220MM. PLEASE SPECIFY THE FIXED ORIENTATIONS FROM THE ORDER CODE (F1, F2, ETC)
3. CONTACT GRAD CONN IF THE ORIENTATION YOU REQUIRE IS NOT SHOWN.
4. WORKING FREQUENCY RANGE: DC-6GHz

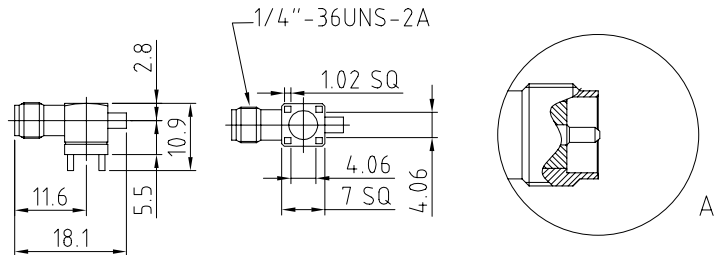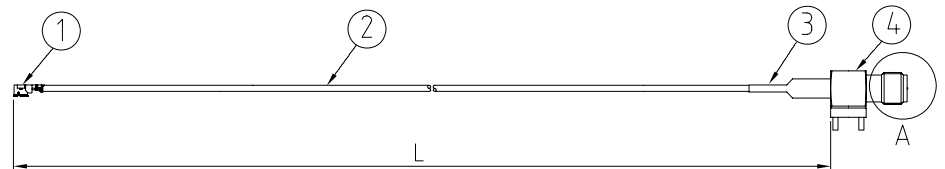


SMA JACK DETAIL DIMENSION

RECOMMENDED PC BOARD LAYOUT

CHART OF CABLE AND CONNECTOR P/N

CABLE ϕ & COLOR	I-PEX P/N	SMA P/N
ϕ 1.13, GRAY	20278-112R-13	C20BI31113015B
ϕ 0.81, GRAY	20311-001R-08	C20BI31108015B
ϕ 1.32, GRAY	20278-112R-32	C20BI31132015B
ϕ 1.37, BLACK	20351-112R-37	C20BI31137015B
RG178, BROWN	20351-112R-37	C20BI31178015B

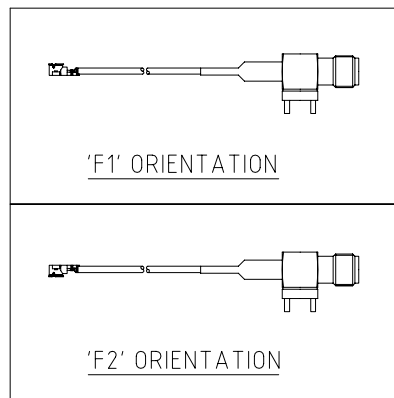

HOW TO ORDER

CABLE 096 RF - X X X - X X - X

"L" LENGTH IN MM
 eg: 100MM = 0100
 (MIN. 025-MAX.400)
 STANDARD = 100, 150, 200)
 Tolerance: $\le 50\text{mm}$: $\pm 2\text{mm}</math>.
 51-200mm: $\pm 5\text{mm}</math>.
 201-400mm: $\pm 7\text{mm}</math>.$$$

CABLE SIZE OPTIONS:
 0 = ϕ 1.13MM CABLE, COLOR: GRAY
 1 = ϕ 0.81MM CABLE, COLOR: GRAY
 2 = ϕ 1.32MM CABLE, COLOR: GRAY
 3 = ϕ 1.37MM CABLE, COLOR: BLACK
 4 = RG178 CABLE, COLOR: BROWN

BLANK = DOES NOT HAVE A FIXED ORIENTATION
 F1 = I-PEX CONNECTION UP (L=25-220MM)
 F2 = I-PEX CONNECTION DOWN (L=25-220MM)
 (SEE NOTES 1, 2, 3 AND DIAGRAMS FOR MORE INFORMATION)

REV. DATE & DRN
 10 09/03/10 - NYW RELEASE
 11 16/03/10 - NYW CHANGE RGT18 CABLE COLOR.
 12 18/05/10 - NYW AMEND SMA DESCRIPTION TO S/T TYPE.
 13 27/09/10 - NYW AMEND IPEX P/N FOR 081 CABLE.

Scale: NTS	THIRD ANGLE	Unstated X .XX .XXX ANGLES	Tolerances: ± 0.2 ± 0.1 ± 0.05 ± 5	Material SEE NOTE
Drawn: NYW				
App'd: XXX	Title: CABLE ASSEMBLY	NOT TO SCALE		
Date: 27 SEP '10	Revision: 1.3	Unit: mm		

THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE COPIED OR DISCLOSED WITHOUT WRITTEN CONSENT

Type: Cable 096 RF
CABLE 096 RF
Drawing Number:
Sheet 1 of 1
Drawing © E and O E