

CABLE 119 RF: RF CABLE ASSEMBLY, HIROSE W.FL + SMA STRAIGHT PLUG + 0.81MM CABLE - 6GHz


SPECIFICATIONS

1. HIROSE W.FL PLUG (W.FL-LP-040)
2. 0.81MM COAXIAL CABLE, COLOR: GRAY
3. SMA STRAIGHT PLUG (C01AA31081004)

USAGE PRECAUTIONS: CABLES USING 'MICRO' COAX ARE DELICATE:
 (i) HANDLE WITH CARE.
 (ii) DO NOT TWIST, APPLY EXCESSIVE FORCES OR SHARP BENDS TO THE CABLE. DO NOT FORCEFULLY DEFORM WIRES.
 (iii) CONSULT CONNECTOR MANUFACTURER'S DATASHEETS FOR DETAILED NOTES ON HANDLING INSTRUCTIONS.

NOTES:

- 1, ELECTRICAL
- WORKING FREQUENCY RANGE: DC-6GHz

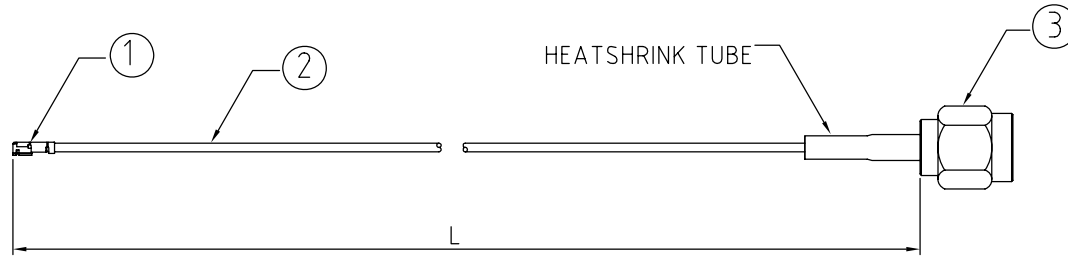

HOW TO ORDER

CABLE 119 RF - X X X

"L" LENGTH IN MM
 eg: 100MM = 0100
 (MIN. 025-MAX.400)
 STANDARD = 100, 150, 200)
 Tolerance: <50mm : ±2mm.
 51-200mm: ±5mm.
 201-400mm: ±7mm.

REV. DATE & DRN
 TO 08/06/11 - NYW RELEASE
 11 10/06/11 - NYW
 CHANGE WORKING FREQUENCY
 TO 6GHz.

Scale: NTS	THIRD ANGLE	Unstated .X .XX .XXX ANGLES	Tolerances: ±0.2 ±0.1 ±0.05 ±5	Material SEE NOTE
Drawn: NYW				
App'd: XXX	Title CABLE ASSEMBLY	NOT TO SCALE		
Date: 10 JUN '11	Revision: 1.1	Unit: mm		



THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE COPIED OR DISCLOSED WITHOUT WRITTEN CONSENT

Type: Cable 119 RF
CABLE 119 RF
Drawing Number:
Sheet 1 of 1
Drawing © E and O E