


CABLE 122 RF: RF CABLE ASSEMBLY, RP SMA ST PLUG + RP SMA FEMALE BULKHEAD WITH O-RING + MULTIPLE CABLE SIZES - 3GHz

SPECIFICATIONS

1. RP SMA STRAIGHT PLUG P/N: C19AA31174-004A
2. COAXIAL CABLE, SEE P/N FOR DETAIL.
3. RP SMA STRAIGHT BULKHEAD JACK WITH O-RING, P/N: C20AD31174-005A

NOTES:
1, ELECTRICAL WORKING FREQUENCY RANGE: DC-3GHz

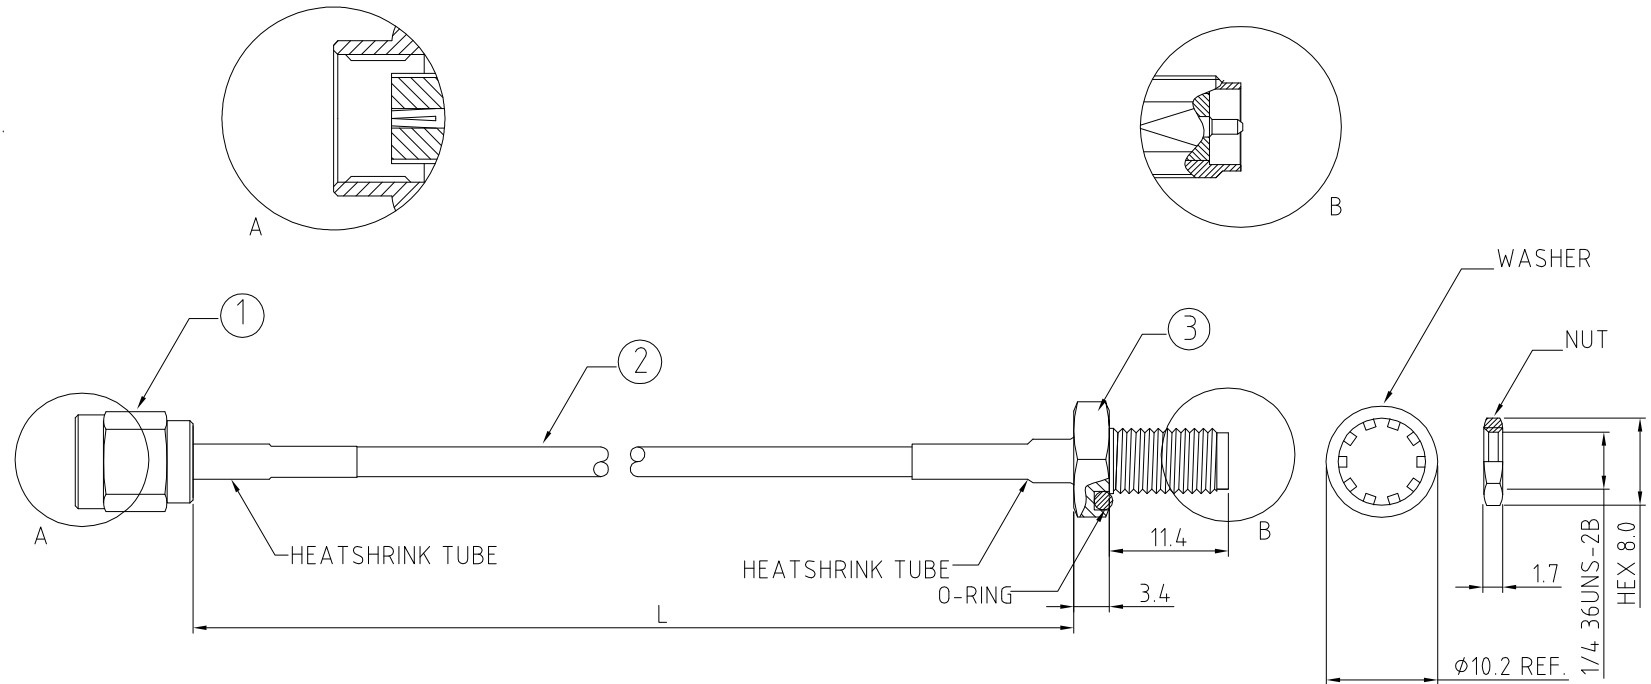


HOW TO ORDER

CABLE 122 RF - X X X X - X - X

"L" LENGTH IN MM
eg: 100MM = 0100
(MIN. = 0050)
STANDARD = 0100, 0150, 0200
Tolerance: $\pm 2\text{mm}$
51-200mm: $\pm 5\text{mm}</math>
201-500mm: $\pm 7\text{mm}</math>
>501mm: $\pm 10\text{mm}</math>$$$

CABLE SIZE OPTIONS:
BLANK = RG316 CABLE, COLOR: BROWN
1 = RG174 CABLE, COLOR: BLACK

WASHER AND NUT OPTIONS:
BLANK = SEPARATELY PACKED (STANDARD)
A = ASSEMBLED WITH CONNECTOR



RECOMMENDED SMA MOUNTING HOLE

REV. DATE & DRN
10 16/08/11 - NYW RELEASE
11 21/06/16 - NYW
ADD RG174 CABLE OPTION
12 02/06/17 - NYW
AMEND RG174 COLOR

Scale: NTS	THIRD ANGLE	Unstated X .XX .XXX ANGLES	Tolerances: ± 0.2 ± 0.1 ± 0.05 ± 5	Material SEE NOTE
Drawn: NYW				
App'd: XXX	Title: CABLE ASSEMBLY	NOT TO SCALE		
Date: 2 JUN '17	Revision: 1.2	Unit: mm		

www.gradconn.com

THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE COPIED OR DISCLOSED WITHOUT WRITTEN CONSENT

Type: Cable 122 RF
CABLE 122 RF
Drawing Number:
Sheet 1 of 1
Drawing © E and O E