

CABLE 290 RF: RF CABLE ASSEMBLY, MMCX S/T PLUG + MMCX R/A PLUG + MULTIPLE CABLE SIZES


SPECIFICATIONS:

1. MMCX STRAIGHT PLUG, P/N:
FOR RG178 CABLE: RFCT-MMCX006-M78.
FOR RG316 CABLE: RFCT-MMCX010-M74.
2. COAXIAL CABLE, SEE P/N FOR DETAIL.
3. MMCX RIGHT ANGLE PLUG, P/N:
FOR RG178 CABLE: RFCT-MMCX003-M78.
FOR RG316 CABLE: RFCT-MMCX004-M74.

NOTES:

1. WORKING FREQUENCY RANGE: DC-6GHz.
2. OPERATING TEMPERATURE: -40°C TO +80°C.
3. IMPEDANCE: 50 OHM.

USAGE PRECAUTIONS: CABLES USING 'MICRO' COAX ARE DELICATE:
 (i) HANDLE WITH CARE.
 (ii) DO NOT TWIST; APPLY EXCESSIVE FORCES OR SHARP BENDS TO THE CABLE. DO NOT FORCEFULLY DEFORM WIRES.
 (iii) CONSULT CONNECTOR MANUFACTURER'S DATASHEETS FOR DETAILED NOTES ON HANDLING INSTRUCTIONS.

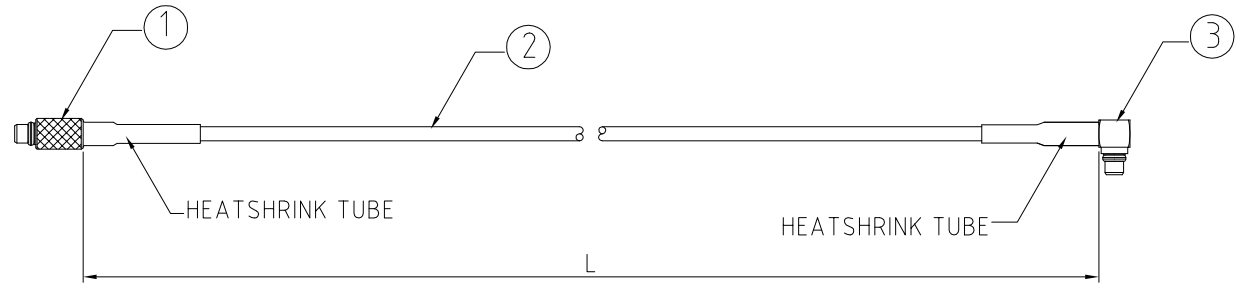

HOW TO ORDER

CABLE 290 RF - X X X X - X

"L" LENGTH IN MM

eg: 100MM = 0100

(MIN. = 0050, MAX. = 2000

STANDARD = 0100, 0150, 0200)

Tolerance: <50mm : ±2mm.

51-200mm: ±5mm.

201-500mm: ±7mm.

>501mm: ±10mm.

CABLE SIZE OPTIONS:

BLANK = RG178, COLOR: BROWN

1 = RG316, COLOR: BROWN

REV. DATE & DRN
 10 23/10/17 - NYW RELEASE
 11 27/03/20 - NYW
 ADD RG316 CABLE OPTION.

Scale: NTS	THIRD ANGLE	Unstated X .XX .XXX ANGLES	Tolerances: N/A N/A N/A N/A	Material SEE NOTE
Drawn: NYW				
App'd: XXX	Title CABLE ASSEMBLY	NOT TO SCALE		
Date: 27 MAR. '20	Revision: 1.1	Unit: mm		

www.gradconn.com

© THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE COPIED OR DISCLOSED WITHOUT WRITTEN CONSENT

Type: Cable 290 RF
CABLE 290 RF
Drawing Number:
Sheet 1 of 1
Drawing © E and O E