



CABLE 340 RF: SMA STRAIGHT PLUG + BNC STRAIGHT BULKHEAD JACK WITH O-RING + RG316 CABLE

SPECIFICATIONS:


1. SMA STRAIGHT PLUG, P/N: RFCT-SMA027-M74.
2. RG316 COAXIAL CABLE, COLOR: BROWN.
3. BNC STRAIGHT BULKHEAD JACK WITH O-RING, P/N: RFCT-BNC008-F74.

NOTES:

1. WORKING FREQUENCY RANGE: DC-3GHz.

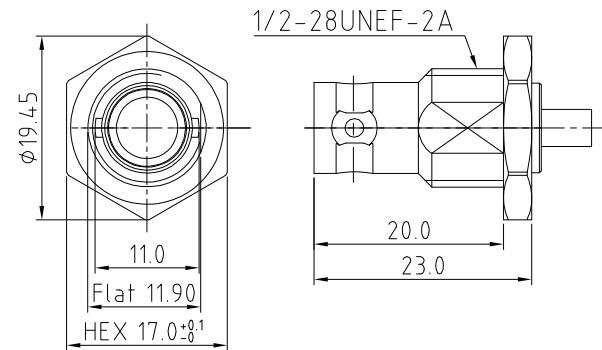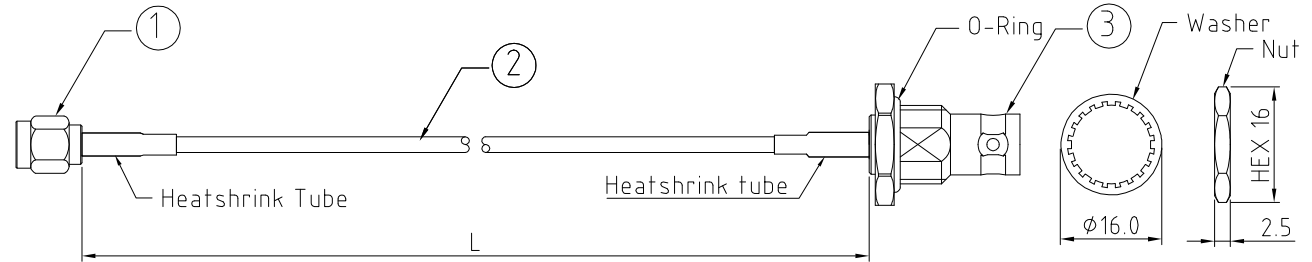

BNC DETAIL DRAWING



RECOMMENDED BNC MOUNTING HOLE

HOW TO ORDER

CABLE 340 RF - X X X X - X - 1

"L" LENGTH IN MM
 eg: 100MM = 0100
 (MIN. = 0050, MAX. = 2000,
 STANDARD = 0100, 0150, 0200)
 Tolerance: 50-200mm: ±5mm.
 201-500mm: ±7mm.
 >500mm: ±10mm.

CABLE SIZE:
 1 = RG316 CABLE, COLOR: BROWN.

WASHER AND NUT OPTIONS:
 BLANK = SEPARATELY PACKED (STANDARD)
 A = ASSEMBLED WITH CONNECTOR

REV. DATE & DRN
 10 27/03/19 - NYW RELEASE

Scale: NTS	THIRD ANGLE	Unstated .X .XX .XXX ANGLES	Tolerances: N/A N/A N/A N/A	Material SEE NOTE
Drawn: NYW				NOT TO SCALE
App'd: XXX	Title: CABLE ASSEMBLY			
Date: 27 MAR. '19	Revision: 1.0	Unit: mm		



THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE COPIED OR DISCLOSED WITHOUT WRITTEN CONSENT

Type: Cable 340 RF
CABLE 340 RF
Drawing Number:
Sheet 1 of 1
Drawing © E and O E