

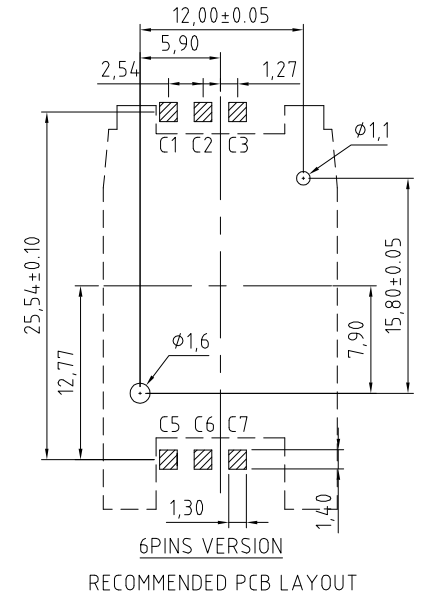
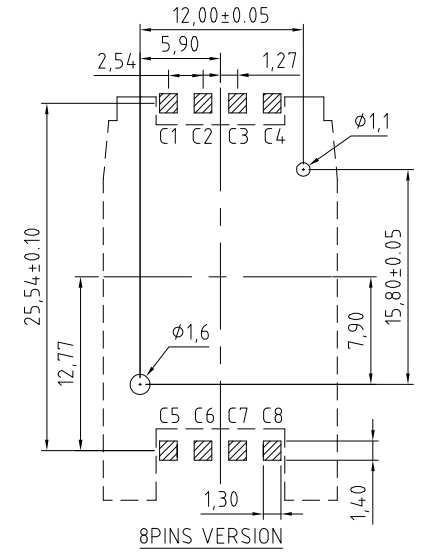
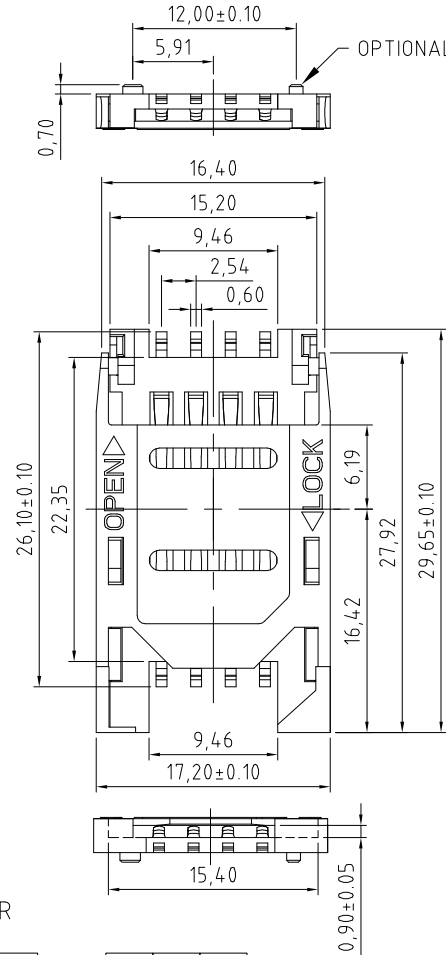



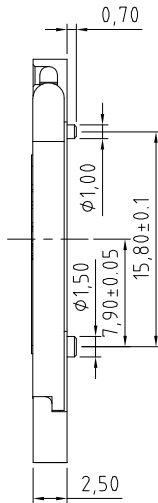

CH03-BL - SIM CARD HOLDER, HINGED TYPE, WITHOUT SWITCH, 6 OR 8 CONTACTS

FEATURES

- GENERAL CHARACTERISTICS**
 DIMENSIONS: 29.65L x 17.20W x 2.50H mm
 WEIGHT: APPROX. 1.0±0.2g
 CONTACT PRINCIPLE: FRICTION TECHNOLOGY
 OPERATING POSITION: SHAFT UP/DOWN/HORIZONTAL
 MOUNTING SYSTEM: SMT TYPE, POST OPTIONAL
 DURABILITY: 5,000 CYCLES MIN.
- MECHANICAL CHARACTERISTICS**
 INSULATION MATERIAL: THERMOPLASTIC, UL 94V-0
 CONTACT MATERIAL: PHOSPHER BRONZE
 CONTACT PLATING : GOLD FLASH OVER NICKEL
- ELECTRICAL CHARACTERISTICS**
 CONTACT RESISTANCE: 50m OHMS TYP. 100m OHMS MAX.
 INSULATION RESISTANCE: >1000M OHMS / 500V DC
 RATED CURRENT: 1A MAX, 10uA MIN.
 RATED VOLTAGE: 50V MAX.
 WITHSTANDING DIELECTRIC VOLTAGE: 500V AC R.M.S. FOR 1 MINUTE
- SOLDERABILITY**
 WAVE: NOT APPLICABLE
 IR REFLOW: 250°C, 5 SEC. MAX.
 MANUAL SOLDERING: 360°C, 3 SEC. MAX.
- ENVIRONMENTAL CHARACTERISTICS**
 OPERATING TEMPERATURE: -40°C ~ +85°C
 OPERATING HUMIDITY: 10% ~ 95% RH
 STORAGE TEMPERATURE: -40°C ~ +85°C
 STORAGE HUMIDITY: 10% ~ 95% RH
 THERMAL SHOCK: -40°C ~ +85°C, 5 CYCLES
 DAMP HEAT: 40°C, 90% RH, 240HR
 SALT-MIST: 35°C, 5% NaCl, 24HR

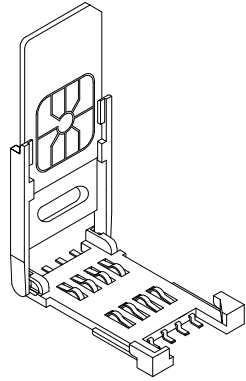

- NOTES:
- ACCEPTABLE SIM CARD SIZE SHOULD MEET GSM 11.11 SPECIFICATION REQUIREMENT.
 - PACKAGING: 800PCS/REEL.

HOW TO ORDER



NO. OF CONTACTS: 06 OR 08
 LOCATING PEG OPTIONS:
 A = WITH PEGS
 B = WITHOUT PEG






REV. DATE & DRN
 10 29/12/11 - NYW RELEASE

Scale: 2.5:1	THIRD ANGLE	Unstated Tolerances: X ±0.35 X ±0.25 XX ±0.15 XXX ±0.10	Material SEE NOTE
Drawn: NYW			
App'd: XXXX	Title SIM CARD ACCEPTOR	NOT TO SCALE	
Date: 29 DEC. '11	Revision: 1.0	Unit: mm	



© THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE COPIED OR DISCLOSED WITHOUT WRITTEN CONSENT

Type: CH03-BL
CH03-BL
Drawing Number:
Sheet 1 of 2
Drawing © E and O E

CH03-BL : PACKAGING DRAWING

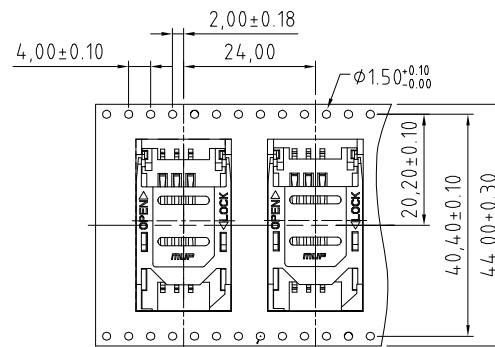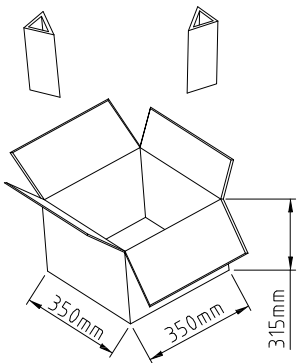

REELING DIRECTION

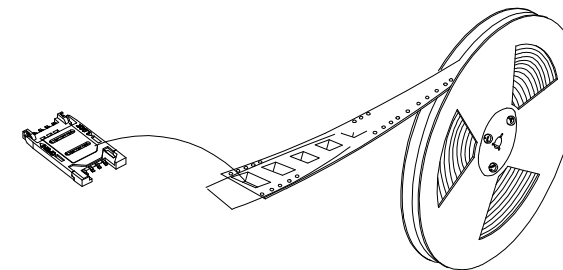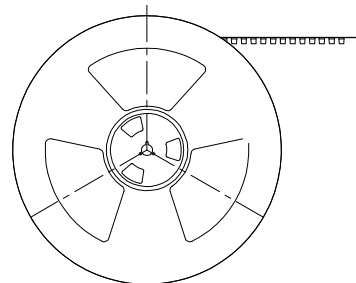

- NOTES:
1. REEL DIA.: 33CM.
 2. 800PCS PER REEL, GROSS WEIGHT: 1.27KG.
 3. 6 REELS PER FULL CARTON, GROSS WEIGHT: 7.0KG.

REV. DATE & DRN
10 29/12/11- NYW RELEASE

Scale: NTS	THIRD ANGLE	Unstated Tolerances: 0 Dec Places 1 Dec Places 2 Dec Places 3 Dec Places	Material SEE NOTE
Drawn: NYW			NOT TO SCALE
App'd: XXXX	Title PACKAGING		Unit: mm
Date: 29 DEC '11	Revision: 1.0		



Type: CH03-BL
CH03-BL
Drawing Number:
Sheet 2 of 2
Drawing © E and O E

THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE COPIED OR DISCLOSED WITHOUT WRITTEN CONSENT