
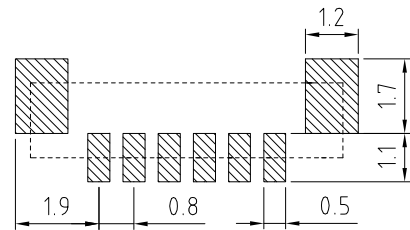
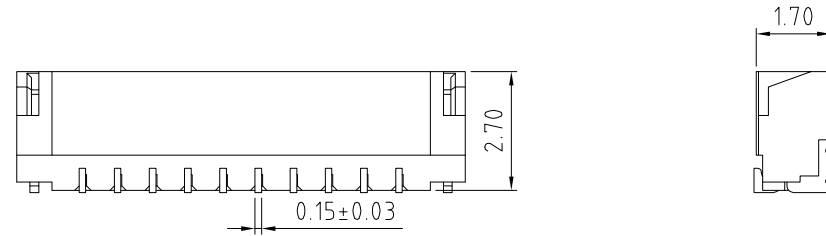



WB06-AA :-0.8mm WTB WAFER, STRAIGHT, SMT TYPE, SINGLE ROW - 02 to 22 CONTACTS

SPECIFICATIONS

CURRENT RATING	0.7A AC/DC△
VOLTAGE RATING	30V AC/DC
INSULATOR RESISTANCE	100 MEGOHMS MIN.
DIELECTRIC WITHSTANDING	200V AC/MINUTE
OPERATING TEMPERATURE	-25°C TO +85°C
CONTACT RESISTANCE	20m OHMS MAX.
INSULATOR MATERIAL	THERMOPLASTIC, UL 94V-0
	STANDARD: NYLON 6T (COLOR: BEIGE)
FINISH	MATTE TIN PLATED OVER NICKEL


MATES WITH:- WB06-AC (NOTE ONLY AVAILABLE IN 2-10 CONTACTS.)

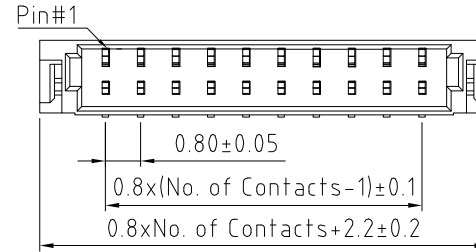

(Tolerance: ±0.05)

RECOMMENDED PC BOARD LAYOUT

HOW TO ORDER



NO. OF CONTACTS:
02 TO 22

PACKAGING TYPE:
8 = TAPE & REEL + CAP (2000PCS/REEL)

REV. DATE & DRN
10. 21/02/13 NYW RELEASE
11. 17/02/13 NYW RELEASE
12. 27/10/15 NYW
12. 27/10/15 NYW
ADD NOTE TO MATES WITH P/N

Scale: 8:1	THIRD ANGLE	Unstated Tolerances: X ±0.20 XX ±0.15	Material SEE NOTE	 www.gradconn.com	Type: WB06-AA
Drawn: NYW					WB06-AA
App'd: XXXX	Title WAFER		NOT TO SCALE		Drawing Number:
Date: 27 OCT. '15	Revision: 12		Unit: mm		Sheet 1 of 1
				THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE COPIED OR DISCLOSED WITHOUT WRITTEN CONSENT	Drawing E and O E