
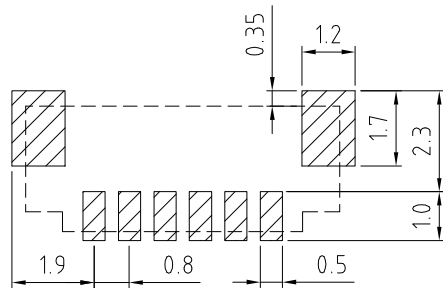
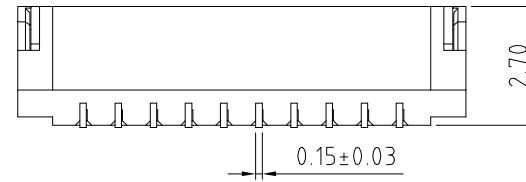
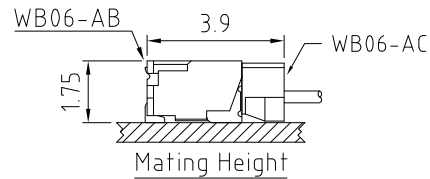


WB06-AB :-0.8mm WTB WAFER, RIGHT ANGLE, SMT TYPE, SINGLE ROW - 02 to 22 CONTACTS

SPECIFICATIONS

CURRENT RATING	0.7A AC/DC Δ
VOLTAGE RATING	30V AC/DC
INSULATOR RESISTANCE	100 MEGOHMS MIN.
DIELECTRIC WITHSTANDING	200V AC/MINUTE
OPERATING TEMPERATURE	-25°C TO +85°C
CONTACT RESISTANCE	20m OHMS MAX.
INSULATOR MATERIAL	THERMOPLASTIC, UL 94V-0
	STANDARD: NYLON 6T (COLOR: BEIGE)
FINISH	MATT TIN PLATED OVER NICKEL


MATES WITH:- WB06-AC (NOTE ONLY AVAILABLE IN 2-10 CONTACTS)

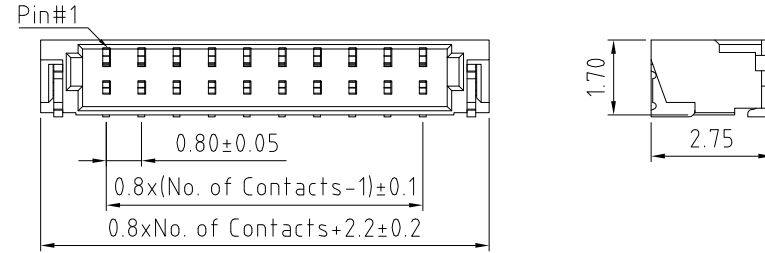

(Tolerance: ±0.05)

RECOMMENDED PC BOARD LAYOUT

HOW TO ORDER



NO. OF CONTACTS:  
02 TO 22

PACKAGING TYPE:  
6 = TAPE & REEL (3000PCS/REEL)Δ

REV. DATE & DRN  
1.0. 26/02/13. NYW. RELEASE  
1.1. 05/07/13. NYW.  
1.2. 05/07/13. NYW.  
1.3. 05/07/13. NYW.  
1.4. 05/07/13. NYW.  
1.5. 05/07/13. NYW.  
1.6. 05/07/13. NYW.  
1.7. 05/07/13. NYW.  
1.8. 05/07/13. NYW.  
1.9. 05/07/13. NYW.  
1.10. 05/07/13. NYW.  
1.11. 05/07/13. NYW.  
1.12. 27/10/15. NYW.  
ADD NOTE TO MATES WITH P/N

Scale: 8:1	THIRD ANGLE	Unstated Tolerances: X ±0.20 XX ±0.15	Material SEE NOTE
Drawn: NYW			
App'd: XXXX	Title: WAFER		NOT TO SCALE
Date: 27 OCT. '15	Revision: 12		Unit: mm

www.gradconn.com

THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE COPIED OR DISCLOSED WITHOUT WRITTEN CONSENT

Type: WB06-AB
WB06-AB
Drawing Number:
Sheet 1 of 1
Drawing © E and O E