
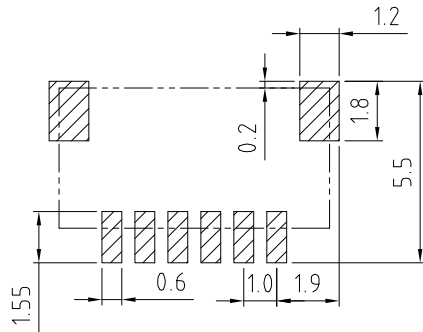

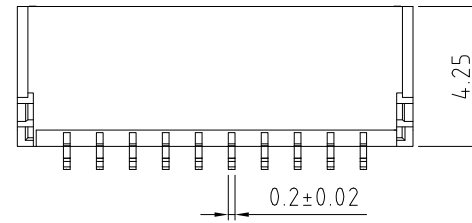
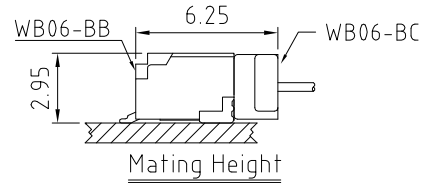


WB06-BB : 1.00mm WTB WAFER, RIGHT ANGLE, SMT TYPE, SINGLE ROW - 02 to 20 CONTACTS

SPECIFICATIONS


CURRENT RATING 1.0A AC/DC (FOR AWG#28)  
 VOLTAGE RATING 50V AC/DC  
 INSULATOR RESISTANCE 100M OHMS MIN.  
 DIELECTRIC WITHSTANDING 500V AC/MINUTE  
 OPERATING TEMPERATURE -25°C TO +85°C  
 CONTACT RESISTANCE 20m OHMS MAX.  
 CONTACT MATERIAL PHOSPHOR BRONZE  
 INSULATOR MATERIAL THERMOPLASTIC, UL 94V-0  
 STANDARD: NYLON 6T (COLOR: BEIGE)  
 FINISH BRIGHT TIN PLATED OVER NICKEL

MATES WITH: - WB06-BC

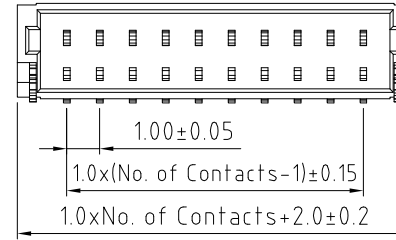

(Tolerance:  $\pm 0.05$ )  
 RECOMMENDED PC BOARD LAYOUT

HOW TO ORDER



NO. OF CONTACTS:  
 02 TO 20

PACKAGING OPTIONS:  
 3 = TUBE  
 6 = TAPE & REEL (STANDARD)

REV. DATE & DRN  
 10. 22/04/13 - NYW RELEASE

Scale: 6:1	THIRD ANGLE	Unstated Tolerances: X $\pm 0.20$ XX $\pm 0.15$	Material SEE NOTE	 www.gradconn.com	Type: WB06-BB
Drawn: NYW					WB06-BB
App'd: XXXX	Title: WAFER		NOT TO SCALE		Drawing Number:
Date: 22 APR. '13	Revision: 1.0		Unit: mm		Sheet 1 of 1
				© THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE COPIED OR DISCLOSED WITHOUT WRITTEN CONSENT	Drawing © E and O E