



Grad Conn Ltd.

格瑞康實業有限公司

# Component Temperature Check List

填表日期 (Date) : 2006.06.19

填表人(Prepare By): 管葉波

零件名稱	接腳/端子外鍍層	重複焊錫次數	溫升	SMT最大耐溫°C幾秒	DIP最大耐溫°C幾秒	手焊最大耐溫°C幾秒
Component Description	Lead /Terminal Coating	Resolder Times	$\Delta T(^{\circ}C)$	SMT Max Temp. Time	Wave Solder Max Temp. Time	Hand Solder Max Temp. Time
Connectors with Nylon 6T (PA6T) Dupont insulators.	Au	3	30°C	260°C/10 sec.	230°C/5~10 sec.	350°C/3~5 sec.


## 溫度曲線圖

### Component Temp. Profile

FORSURE SMT REFLOW M/C TEST SYSTEM

CURRENT TEMPERATURE 46 °C

MAXIMUM TEMPERATURE 262 °C

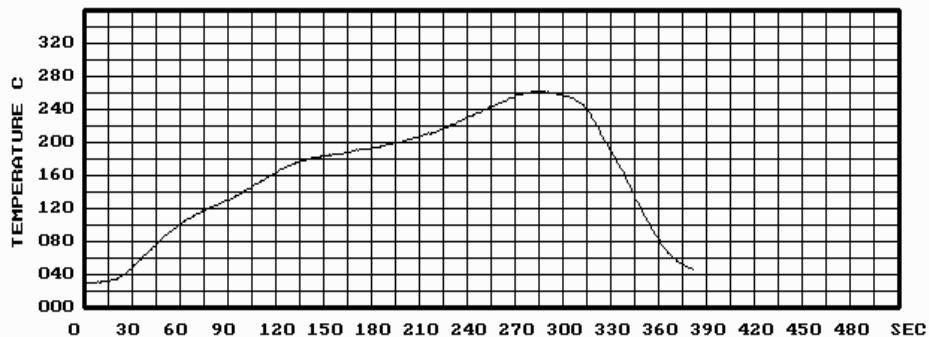

S START TEST

Q QUIT

PCB TYPE: \_\_\_\_\_

E STOP TEST & QUIT

R RESET

DATE: \_\_\_\_\_

## 接腳/端子鍍層剖面圖

### Lead / Terminal Cross Section

