



格瑞康實業有限公司

No. 139 Wuhan Rd., Longtan Township, Taoyuan County, Taiwan 32549

Tel: +886-3-4993132 Fax: +886-3-4991561

www.gradconn.com

PRODUCT SPECIFICATION

Grad Conn Part No.:

CH03-DD-B

Product Description:

Sim Card Holder Without Switch Push Push Type


TABLE OF CONTENTS

<u>ARTICLE</u>	<u>PAGE</u>
1 INTRODUCTION.....	1
General.....	1
Features	1
Applications	1
2 TECHNICAL CHARACTERISTICS.....	2
2.1 General Characteristics.....	2
2.2 Electrical Characteristics	2
2.3 Mechanical Characteristics	2
2.4 Solderability.....	2
2.5 Environmental Characteristics.....	3
3 ORDERING CODE.....	3
4 INTERFACE	4
4.1 Signals	4
5 MECHANICAL OUTLINE DRAWING	5
5.1 Mechanical Outline Dimension (6 pins)	5
5.2 Reference Dimension for PCB Layout (6 pins).....	5
5.3 Mechanical Outline Dimension (8 pins)	6
5.4 Reference Dimension for PCB Layout (8 pins).....	6
APPENDIX A: PACKING INFORMATION	7
A1: Carrier Tape (Meet EIA-481 standard).....	7
APPENDIX B: SIM CARD DIMENSION (According to standard GSM 11.11).....	8

1. INTRODUCTION

General:

The CH03-DD-B is an interface device for GSM 11.11 SIM card. It is designed for high performance and flexibility to give prospective customers a quick applications of the individual devices in there product series, and to facilitate selection if the device it decides that are best-suited to intended target applications.



Features:

- ◆ GSM 11.11 Standard SIM Card. ^(note)
- ◆ Ultra Slim (H = 1.9 mm)
- ◆ Slim Physical Size for Multi-Purpose Application.
- ◆ High Reliability Low-Friction Contact Extension operation Life of Contact.
- ◆ Push Push Type.
- ◆ RoHS Directive 2002/95/EC Compliant.

Applications:

- ◆ Access Control Terminals.
- ◆ Mobile Telecommunications.
- ◆ Palm Top Machines.
- ◆ Terminal Identification module.
- ◆ Other Identification recognition.

Note: All trademarks mentioned herein are the property of their respective companies.

2. TECHNICAL CHARACTERISTICS

2.1 General Characteristics:

Items	Standard	Description
Dimension		27.55L x 18.70W x 1.90H mm
Weight		Approx. 1.38 g
Card size	GSM 11.11	25.0 x 15.0 x 0.76 mm
Contact principle		Friction technology
Operating position		Shaft up / Down / Horizontal
Mounting System		SMT Type (without post)
Function		Push Push Type
Durability		5,000 cycles min.

2.2 Electrical Characteristics: According to Standard IEC512

Items	Standard	Description
Number of contacts		6, 8 pins (optional)
Contact resistance	IEC512-2-2a	50 m Ω typical, 100 m Ω max.
Insulation resistance Pin to pin	IEC512-2-3a	> 1000 M Ω / 500 V DC
Rated voltage		30 V Max.
Rated current		1 A max.
Dielectric withstanding voltage	IEC512-2-4a	500 V AC rms 1 min. (sea level)

2.3 Mechanical Characteristics:

Items	Standard	Description
Contact force	SIM Card 0.76mm	0.2N ~ 0.6N
Card insertion force		1N ~ 10N
Card withdrawal force		1N ~ 10N
Contact location	GSM 11.11	
Data Contacts		
Material		Phosphor bronze
Plating		Gold over Nickel
Insulation material		Thermoplastic, UL 94V-0
Cover material		Stainless Steel

2.4 Solderability: According to Standard IEC68

Items	Standard	Description
Wave		Not applicable
IR reflow		260°C, 10 sec. Max.
Manual soldering	IEC68-2-20	360°C, 3 sec. Max.


2.5 Environmental Characteristics: According to Standard IEC68

Items	Standard	Description
Operating temperature		- 40°C ~ + 85°C
Operating humidity		10 % ~ 95 % RH
Storage temperature		- 40°C ~ + 85°C
Storage humidity		10 % ~ 95 % RH

3. ORDERING CODE

Part Number	Number of Contacts	PCB Locating Pegs (Post)	Logo
CH03-DD060-BAR	6	Yes	No
CH03-DD060-BBR	6	No	No
CH03-DD080-BAR	8	Yes	No
CH03-DD080-BBR	8	No	No


4. INTERFACE

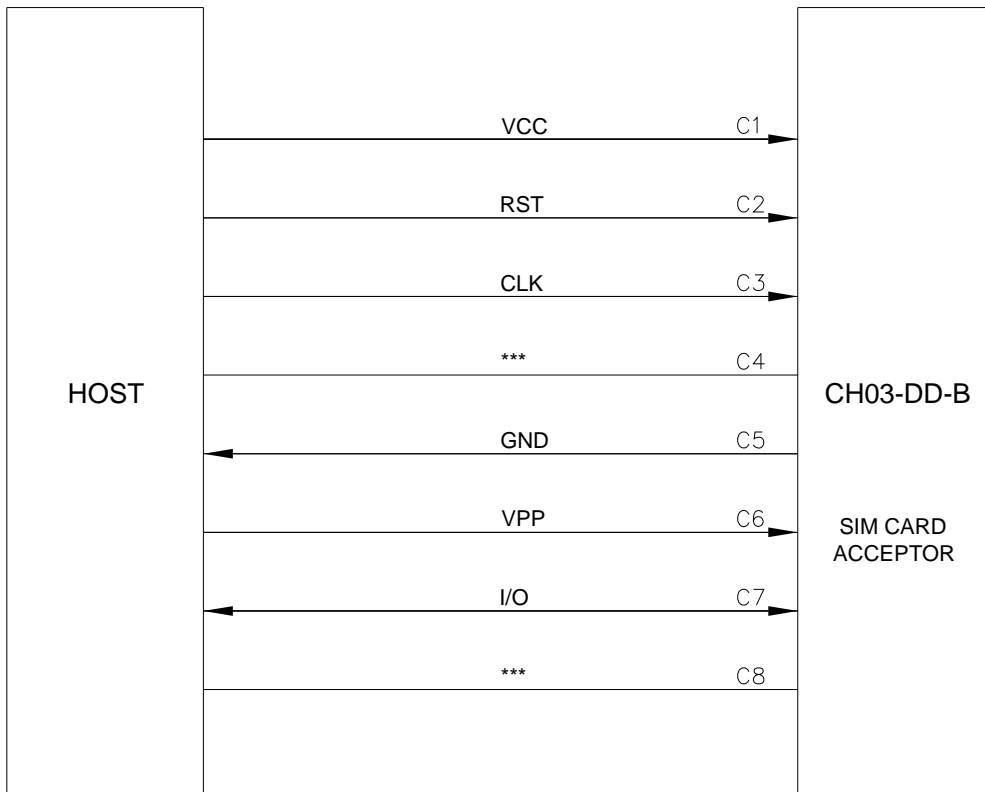

4.1 Signals


Signal interface connections for CH03-DD-B are shown below.

Contact No.	Assignment	Description	Remark
C1	VCC	Power Voltage	
C2	RST	Reset Signal	
C3	CLK	Clocking Signal	
C4	***	Reserved for feature use	
C5	GND	Power and Signal Ground	
C6	VPP	Programming Voltage	
C7	I/O	Serial Data input/output	
C8	***	Reserved for feature use	

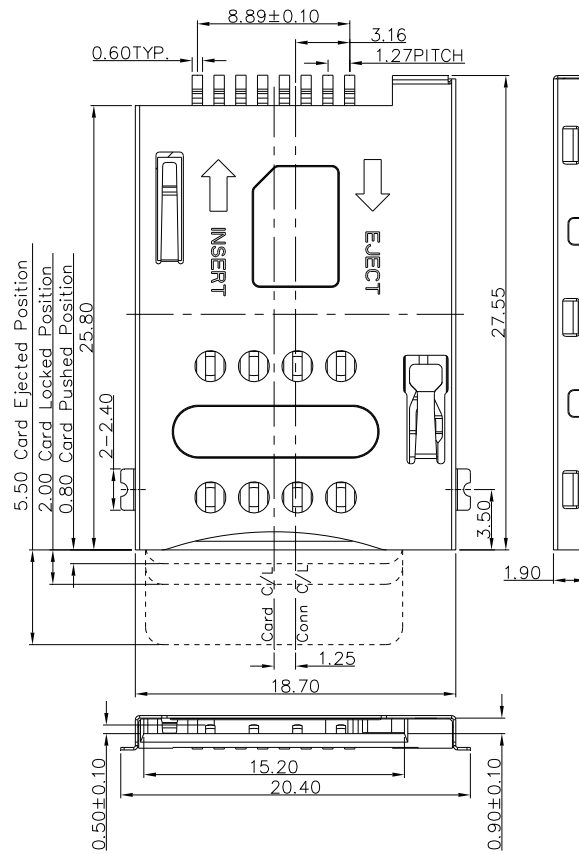

Unit: mm; Tolerances: ± 0.15 mm

Figure 5.3 Mechanical outline dimension (8 pins)

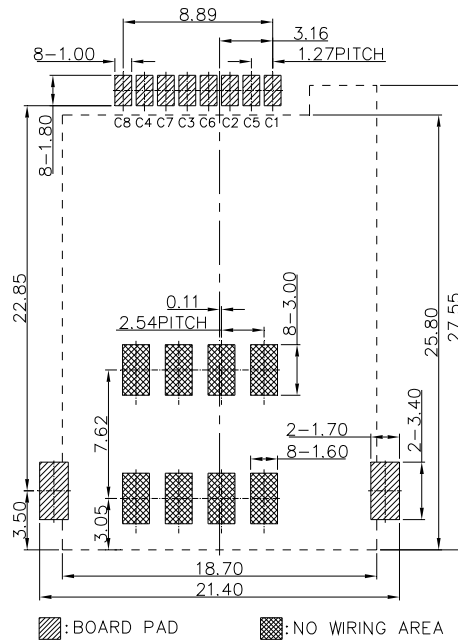


Unit: mm; Tolerances: ± 0.05 mm


Figure 5.4 Reference dimension for PCB layout (8 pins)

APPENDIX A: PACKING INFORMATION

A1: Carrier Tape (Meet Standard EIA-481)

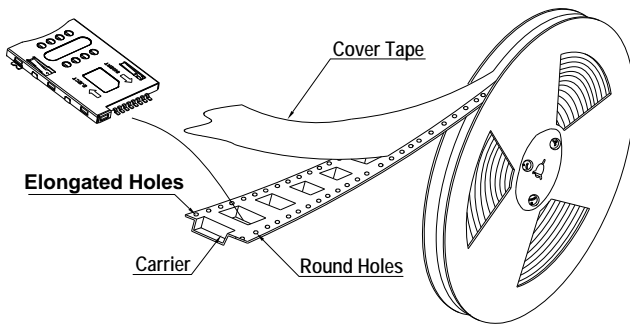


N.W.: 0.83 KGS
G.W.: 1.38 KGS
Q'ty: 600 PCs per reel
Meas.: dia. 33 CM, W 4.4 CM

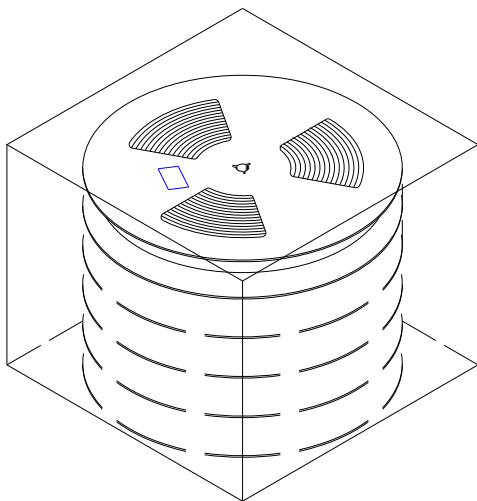

N.W.: 8.28 KGS
G.W.: 9.48 KGS
Q'ty: 3,600 PCs per carton
(6 reels set in order)
Meas.: 35.0L x 35.0W x 32.5H CM

APPENDIX B: SIM CARD DIMENSION (According to Standard GSM 11.11)

Dimensions in millimeters (mm)

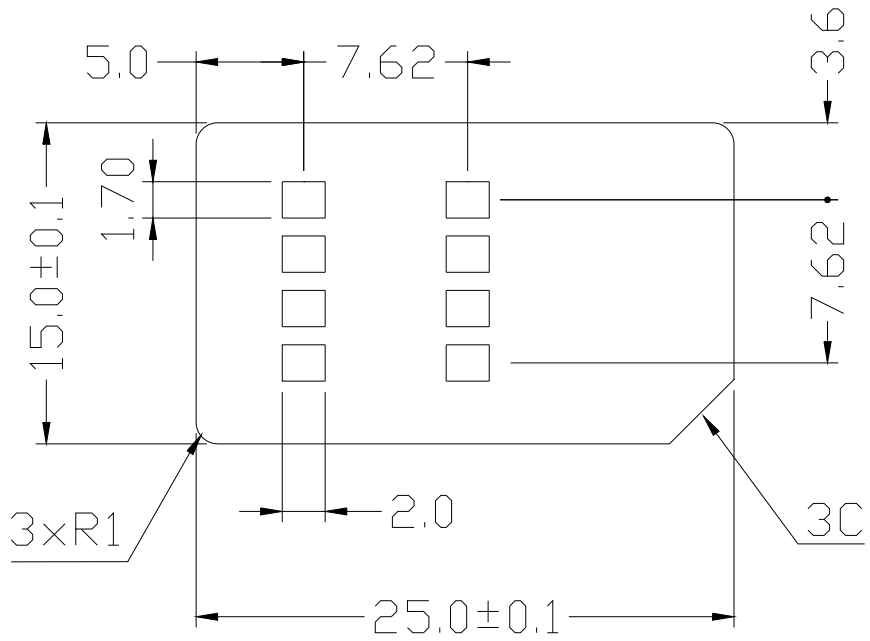

Thickness: 0.76 ± 0.08 mm