

CH03-DD-B - SIM CARD HOLDER WITHOUT SWITCH 6 OR 8 PINS PUSH PUSH TYPE

FEATURES




1. GENERAL CHARACTERISTICS
 DIMENSIONS: 27.55L x 18.70W x 1.90H mm
 WEIGHT: APPROX. 1.38g
 CONTACT PRINCIPLE: FRICTION TECHNOLOGY
 OPERATING POSITION: SHAFT UP / DOWN / HORIZONTAL
 MOUNTING SYSTEM: SMT TYPE (without post)
 FUNCTION: PUSH PUSH TYPE
 DURABILITY: 5,000 CYCLES MIN.

2. MECHANICAL CHARACTERISTICS
 INSULATION MATERIAL: THERMOPLASTIC, UL 94V-0
 ROHS DIRECTIVE 2002/95/EC COMPLIANT

3. ELECTRICAL CHARACTERISTICS
 NUMBER OF CONTACTS: 6, 8 PINS (OPTIONAL)
 CONTACT RESISTANCE: 50M OHMS TYP. 100M OHMS MAX.
 INSULATION RESISTANCE: > 1000M OHMS / 500V DC


4. SOLDERABILITY
 WAVE: NOT APPLICABLE
 IR REFLOW: 260°C, 10 SEC. MAX.
 MANUAL SOLDERING: 360°C, 3 SEC. MAX.

5. ENVIRONMENTAL CHARACTERISTICS
 OPERATING TEMPERATURE: -40°C ~ +85°C
 OPERATING HUMIDITY: 10% ~ 95% RH
 STORAGE TEMPERATURE: -40°C ~ +85°C
 STORAGE HUMIDITY: 10% ~ 95% RH

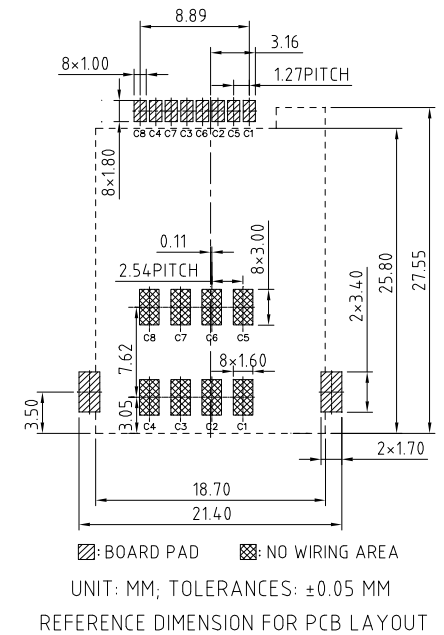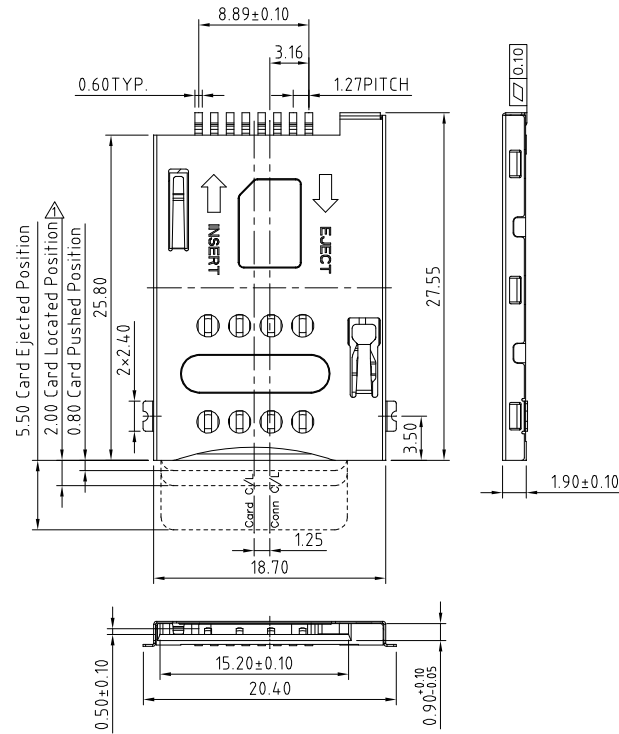

NOTES:
 1. ACCEPTABLE SIM CARD SIZE SHOULD MEET GSM 11.11 SPECIFICATION REQUIREMENT.

HOW TO ORDER

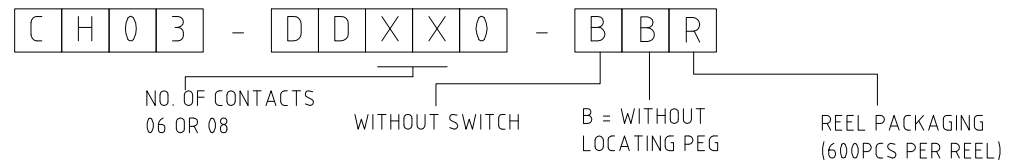

REV. DATE & DRN
 10 18/06/09-CHC RELEASE
 11 04/07/13-NYW
 12 07/12/14-NYW
 AMEND DESCRIPTION
 REMOVE WITH PEG OPTION

Scale: NTS	THIRD ANGLE	Unstated Tolerances: XX ±0.15	Material: SEE NOTE
Drawn: CHC			
App'd: XXXX	Title: SIM CARD ACCEPTOR		NOT TO SCALE
Date: 1 DEC. '14	Revision: 1.2		Unit: mm

www.gradconn.com

THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE COPIED OR DISCLOSED WITHOUT WRITTEN CONSENT

Type: CH03-DD
CH03-DD-B
Drawing Number:
Sheet 1 of 1
Drawing C E and O E