CABLE 145 RF: RF CABLE ASSEMBLY, HIROSE H.FL + RP TNC BULKHEAD WITH O-RING + 1.37 CABLE

SPECIFICATIONS:


- 1. HIROSE H.FL PLUG: H.FL-LP
- 2. \$\phi 1.37MM COAXIAL CABLE, COLOR: BLACK.
- 3. RP TNC BULKHEAD JACK WITH 0-RING (C26CDWS178003C)


NOTES:

- 1. THE ORIENTATION OF CONNECTORS ON DRAWING IS FOR REFERENCE ONLY, IF THE ORDER IS LEFT BLANK THE CONNECTOR WILL NOT HAVE FIXED ORIENTATION.
- 2. FIXED ORIENTATION IS SUGGESTED FOR CABLE LENGTH 25MM TO 100MM. PLEASE SPECIFY THE FIXED ORIENTATIONS FROM THE ORDER CODE (F1, F2, ETC)
- 3. CONTACT GRAD CONN IF THE ORIENTATION YOU REQUIRE IS NOT SHOWN.
- 4. WORKING FREQUENCY RANGE: DC-3GHz

USAGE PRECAUTIONS: CABLES USING 'MICRO' COAX ARE DELICATE:

- (i) HANDLE WITH CARE.
- (ii) DO NOT TWIST; APPLY EXCESSIVE FORCES OR SHARP BENDS TO THE CABLE. DO NOT FORCEFULLY DEFORM WIRES.
- (iii) CONSULT CONNECTOR MANUFACTURER'S DATASHEETS FOR DETAILED NOTES ON HANDLING INSTRUCTIONS.

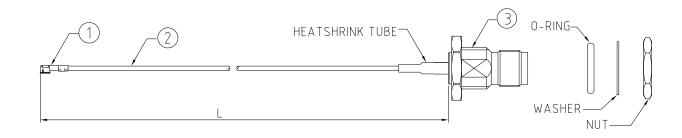





WASHER AND NUT OPTIONS:


BLANK = SEPERATELY PACKED (STANDARD)

A = ASSEMBLED WITH CONNECTOR

ORIENTATION OPTIONS:

BLANK = DOES NOT HAVE A FIXED ORIENTATION F1 = H.FL CONNECTION DOWN (L=25-220MM) F2 = H.FL CONNECTION UP (L=25-220MM)

(SEE NOTES 1, 2, 3 AND DIAGRAMS FOR MORE INFORMATION)



RP TNC DETAIL DRAWING



RECOMMENDED THE MOUNTING HOLE

	ASE ION.	Scale: NTS	THIRD ANGLE	Unstated Tolerances: .X ±0.2	Material
2	I.E.Y. JURY RELEASE 10.60/12/12- NIV RELEASE ADD 1.37MM CABLE OPTION ADD 1.37MM CABLE OPTION	Drawn: NYW	→ ◆	.XX ±0.1 .XXX ±0.05 ANGLES ±5	SEE NOTE
A L & UK	IT & XIV IT	App'd: XXX	Title CABLE ASSE	Title CABLE ASSEMBLY	
۳. ارد	ADD	Date: 16 JUL. '14	Revision: 1.1		Unit: mm

Tolerance: <50mm: ±2mm.

51-200mm: ±5mm.

201-400mm: ±7mm.



THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE COPIED OR DISCLOSED WITHOUT WRITTEN CONSENT

Type: Cable 145 RF

CABLE 145 RF

Drawing Number:

Sheet 1	of 1
Drawing (C)	E and O E