

CABLE 092 RF: RF CABLE ASSEMBLY, SMA ST PLUG + SMA ST PLUG + MULTIPLE CABLE SIZES

SPECIFICATIONS :

1. SMA STRAIGHT PLUG P/N:


- FOR RG174 & RG316 SINGLE SHIELD CABLE: C01AA31174004A
- FOR ϕ 0.81MM CABLE: C01AA31081004
- FOR ϕ 1.13MM CABLE: C01AA31113004
- FOR ϕ 1.32MM CABLE: C01AA31132004
- FOR ϕ 1.37MM CABLE: C01AA31137004
- FOR ϕ 1.48MM CABLE: C01AA31148004
- FOR RG178 CABLE: C01AA31178004
- FOR RG316 DOUBLE SHIELD CABLE: C01AA3F316D04A

2. MIT COAXIAL CABLE (SEE CABLE OPTIONS FOR DETAIL).

NOTES:

1. WORKING FREQUENCY RANGE:

- DC-3GHz (RG174 CABLE)
- DC-6GHz (RG316, ϕ 0.81MM, ϕ 1.13MM, ϕ 1.32MM, ϕ 1.37MM, ϕ 1.47MM, RG178 CABLES)

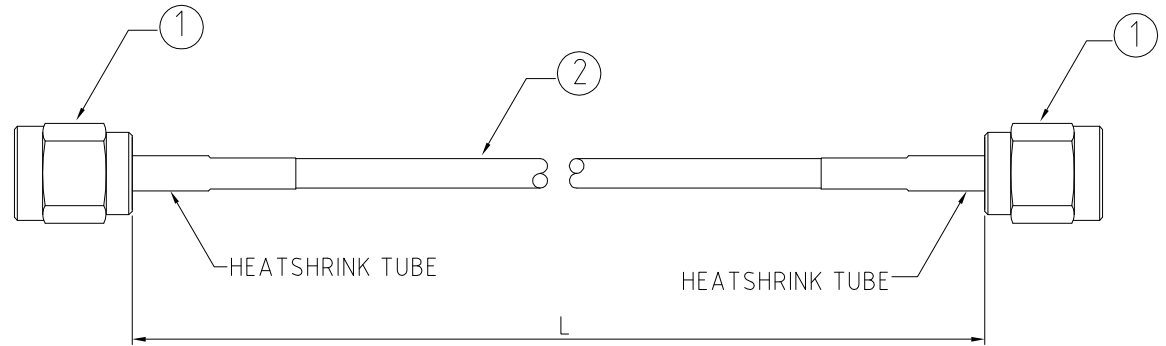

HOW TO ORDER

CABLE 092 RF - X X X X - X

"L" LENGTH IN MM

- eg: 100MM = 0100
- (MIN. = 0050, MAX. = 2000)
- STANDARD = 0100, 0150, 0200)
- Tolerance: <50mm : \pm 2mm.
- 51-200mm: \pm 5mm.
- 201-500mm: \pm 7mm.
- >501mm: \pm 10mm.

CABLE SIZE OPTIONS:

- BLANK = RG174 CABLE, COLOR:BLACK
- 1 = RG316 SINGLE SHIELD CABLE, COLOR:BROWN
- 2 = ϕ 0.81MM CABLE, COLOR: GRAY
- 3 = ϕ 1.13MM CABLE, COLOR: GRAY
- 4 = ϕ 1.32MM CABLE, COLOR: GRAY
- 5 = ϕ 1.37MM CABLE, COLOR: BLACK
- 6 = ϕ 1.48MM CABLE, COLOR: BLACK
- 7 = RG178 CABLE, COLOR: BROWN
- 8 = RG316 DOUBLE SHIELD CABLE, COLOR: BROWN

REV. DATE & DRN	10 07/02/09 - NYW RELEASE
	11 05/03/10 - NYW ADD CABLE SIZE OPTION 1
	12 22/03/10 - NYW ADD CABLE SIZE OPTION 2-7
	13 16/02/12 - NYW ADD CABLE SIZE OPTION 8
	14 22/09/15 - NYW AMEND WORKING FREQUENCY

Scale: NTS	THIRD ANGLE	Unstated X .XX .XXX ANGLES	Tolerances: \pm 0.2 \pm 0.1 \pm 0.05 \pm 5	Material SEE NOTE
Drawn: NYW				
App'd: XXX	Title CABLE ASSEMBLY			NOT TO SCALE
Date: 22 SEP. '15	Revision: 1.4			Unit: mm



www.gradconn.com

THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE COPIED OR DISCLOSED WITHOUT WRITTEN CONSENT

Type: Cable 092 RF
CABLE 092 RF
Drawing Number:
Sheet 1 of 1
Drawing © E and O E