



CABLE 092 RF: RF CABLE ASSEMBLY, SMA ST PLUG + SMA ST PLUG + MULTIPLE CABLE SIZES


SPECIFICATIONS :

- SMA STRAIGHT PLUG P/N:  
 FOR RG174 & RG316 CABLE: C01AA31174004A  
 FOR Ø0.81MM CABLE: C01AA31081004  
 FOR Ø1.13MM CABLE: C01AA31113004  
 FOR Ø1.32MM CABLE: C01AA31132004  
 FOR Ø1.37MM CABLE: C01AA31137004  
 FOR Ø1.48MM CABLE: C01AA31148004  
 FOR RG178 CABLE: C01AA31178004

2. MIT COAXIAL CABLE (SEE CABLE OPTIONS FOR DETAIL).

NOTES:

- WORKING FREQUENCY RANGE: DC-6GHz

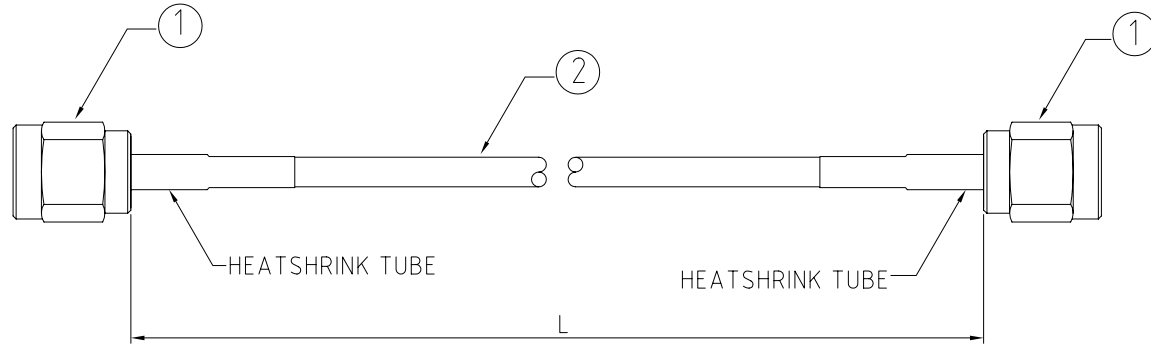

HOW TO ORDER

CABLE 092 RF - X X X X - X

"L" LENGTH IN MM  
 eg: 100MM = 0100  
 (MIN. = 0050, MAX. = 2000)  
 STANDARD = 0100, 0150, 0200  
 Tolerance: <50mm : ±2mm.  
 51-200mm: ±5mm.  
 201-500mm: ±7mm.  
 >501mm: ±10mm.

CABLE SIZE OPTIONS:  
 BLANK = RG174 CABLE, COLOR:BLACK  
 1 = RG316 CABLE, COLOR:BROWN  
 2 = Ø0.81MM CABLE, COLOR: GRAY  
 3 = Ø1.13MM CABLE, COLOR: GRAY  
 4 = Ø1.32MM CABLE, COLOR: GRAY  
 5 = Ø1.37MM CABLE, COLOR: BLACK  
 6 = Ø1.48MM CABLE, COLOR: BLACK  
 7 = RG178 CABLE, COLOR: BROWN

REV. DATE & DRN  
 10 07/02/09 - NYW RELEASE  
 11 05/03/10 - NYW  
 ADD: CABLE SIZE OPTION 1.  
 12 22/03/10 - NYW  
 ADD: CABLE SIZE OPTION 2-7

Scale: NTS	THIRD ANGLE	Unstated .X .XX .XXX ANGLES	Tolerances: ±0.2 ±0.1 ±0.05 ±5	Material SEE NOTE
Drawn: NYW				
App'd: XXX	Title: CABLE ASSEMBLY	NOT TO SCALE		
Date: 22 MAR '10	Revision: 1.2	Unit: mm		

www.gradconn.com

THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE COPIED OR DISCLOSED WITHOUT WRITTEN CONSENT

Type: Cable 092 RF
CABLE 092 RF
Drawing Number:
Sheet 1 of 1
Drawing © E and O E