

CABLE 078 RF: RF CABLE ASSEMBLY, I-PEX MHF + SMA FEMALE BULKHEAD + 1.13MM CABLE - 6GHz


SPECIFICATIONS

1. I-PEX MHF PLUG (20278-112R-13), GOLD (ALTERNATIVE TO HIROSE U.FL)
2. 1.13MM COAXIAL CABLE, COLOR: GRAY
3. SMA ST BULKHEAD (C02AB31113003), CRIMP TYPE-GOLD

USAGE PRECAUTIONS: CABLES USING 'MICRO' COAX ARE DELICATE:
 (i) HANDLE WITH CARE.
 (ii) DO NOT TWIST; APPLY EXCESSIVE FORCES OR SHARP BENDS TO THE CABLE. DO NOT FORCEFULLY DEFORM WIRES.
 (iii) CONSULT CONNECTOR MANUFACTURER'S DATASHEETS FOR DETAILED NOTES ON HANDLING INSTRUCTIONS.

NOTES:

1. THE ORIENTATION OF CONNECTORS ON DRAWING IS FOR REFERENCE ONLY, FIXED ORIENTATION IS POSSIBLE FOR CABLE SHORTER THAN 100MM. PLEASE CONTACT US IF YOU REQUIRE A SPECIFIC ORIENTATION.
2. ELECTRICAL:
WORKING FREQUENCY RANGE: DC-6GHz

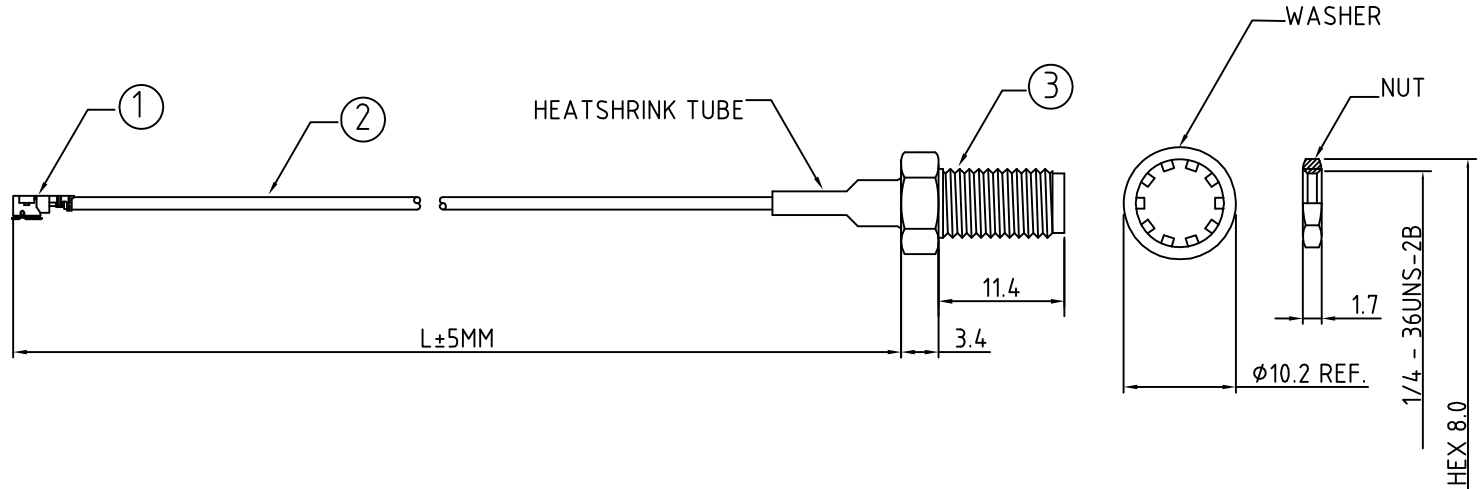


HOW TO ORDER


CABLE 078 RF - X X X - X

"L" LENGTH IN MM
 eg: 100MM = 100
 (MIN. 50 - MAX. 400,
 STANDARD : 100, 150, 200)

WASHER AND NUT OPTIONS:
 BLANK = SEPERATELY PACKED (STANDARD)
 A = ASSEMBLED WITH CONNECTOR

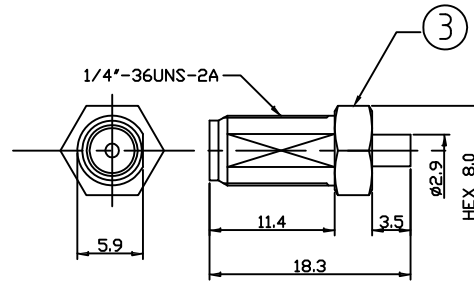

SMA JACK DETAIL DIMENSION



RECOMMENDED SMA MOUTING HOLE

REV. DATE & DRN TO 31/07/09 - NYW RELEASE

Scale: NTS	THIRD ANGLE	Unstated .X ±0.2 .XX ±0.1 .XXX ±0.05 ANGLES ±5	Material SEE NOTE
Drawn: NYW			
App'd: XXX	Title CABLE ASSEMBLY	NOT TO SCALE	
Date: 31 JUL '09	Revision: 1.0	Unit: mm	



THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE COPIED OR DISCLOSED WITHOUT WRITTEN CONSENT

Type: Cable 078 RF
CABLE 078 RF
Drawing Number:
Sheet 1 of 1
Drawing © E and O E